



UPP-NERR ÅTTA

CHA - 009, CHA - 010

CUT SHEET






UPP-NERR ÅTTA

CHA - 009, CHA - 010


PRODUCT DESCRIPTION

Upp-Nerr is Swedish for “up” and “down,” named after its clever combination of up and down light casting. This chandelier is crafted at 80mm tall by 40mm wide, and masterfully blends ambiance and direct lighting for both residential and commercial spaces. Beautifully effective as a standalone fixture, Upp-Nerr warmly illuminates surfaces below while delicately showering the surroundings with a soft, vertical glow.

CUP MOUNTING HARDWARE DIAGRAM

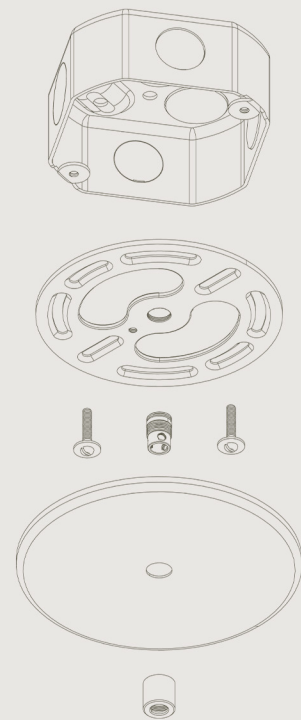

DIMENSIONAL DRAWING

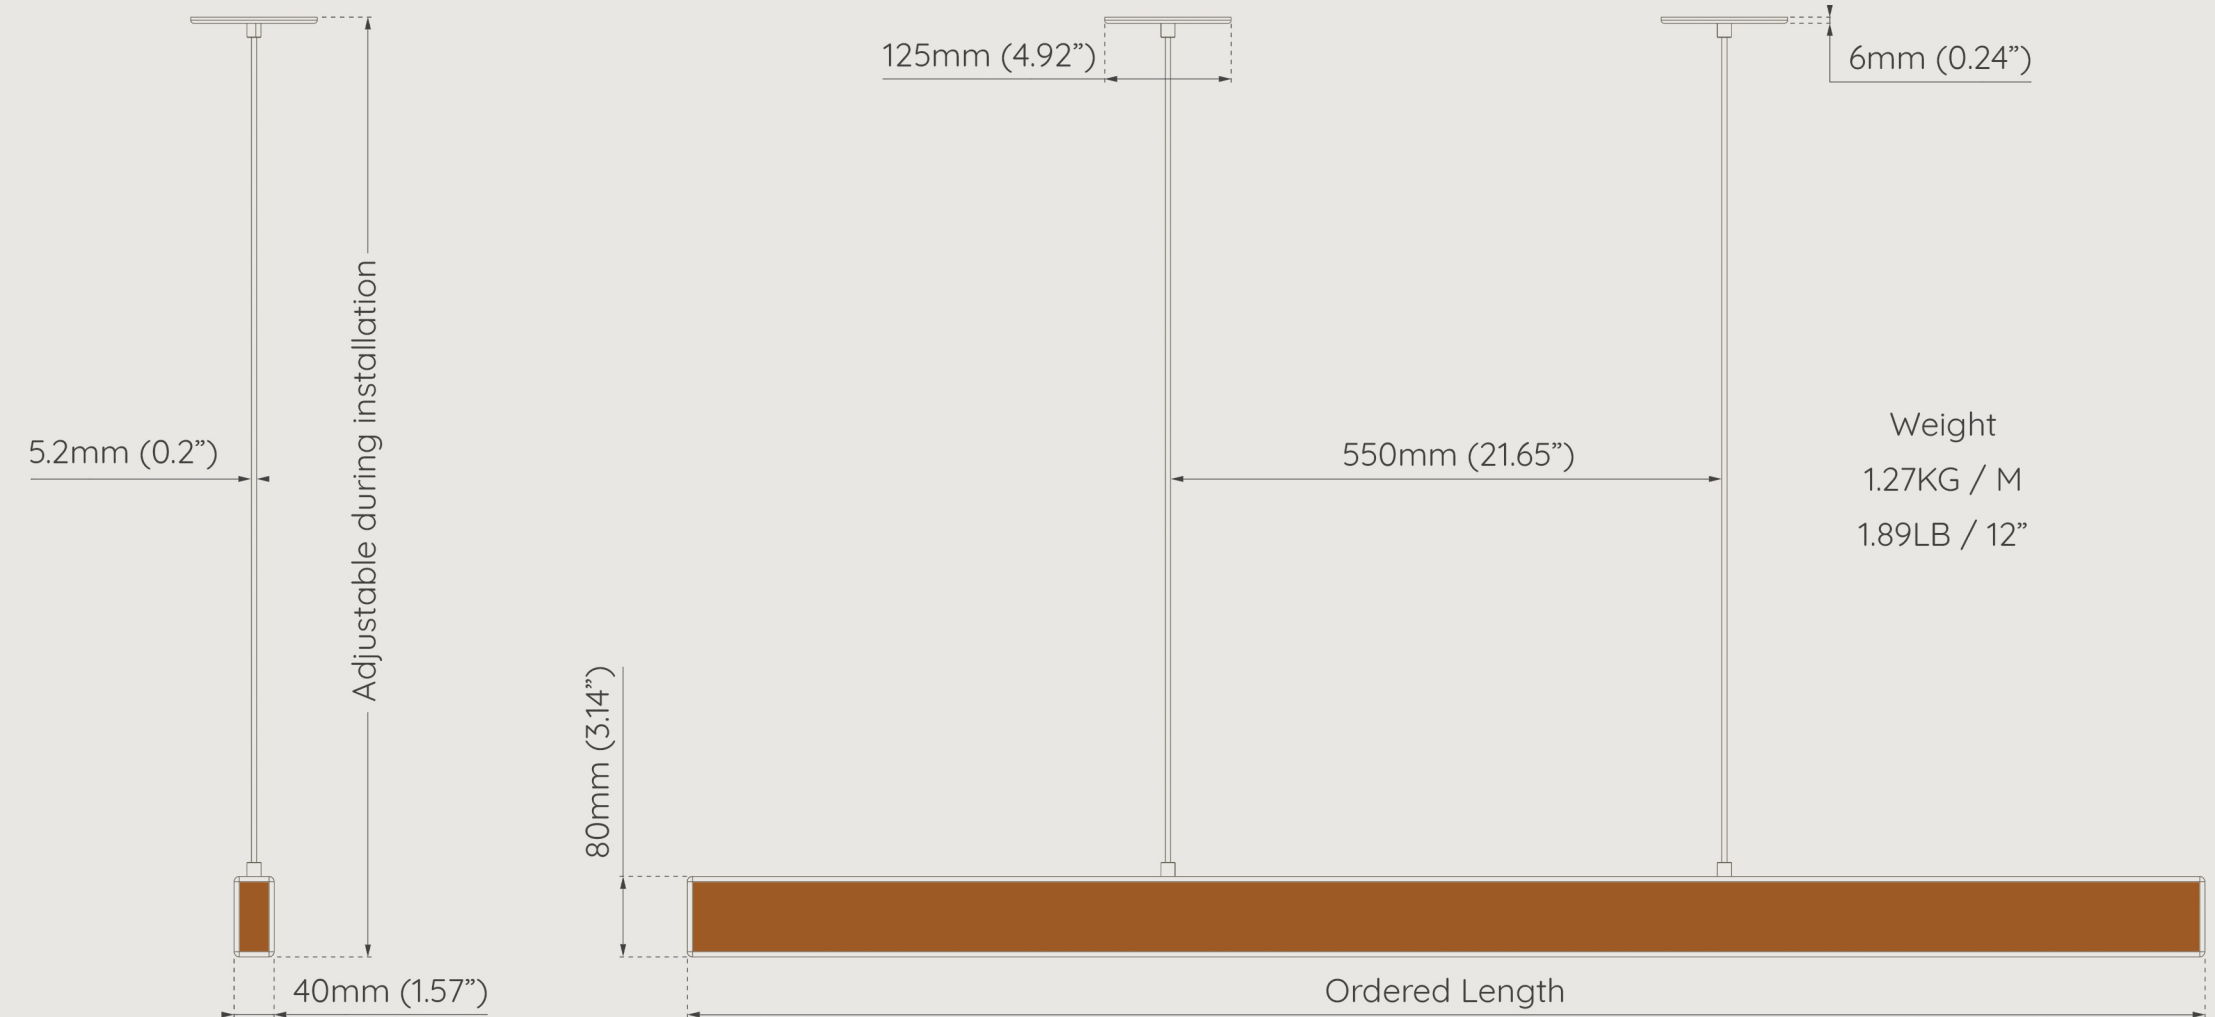

PRODUCT OPTIONS

WOOD TYPE

- White Oak
- Cherry
- Ash
- Walnut
- Hard Maple

LENGTH

- 800mm (31.5")
- 1800mm (71")
- 1000mm (39.4")
- 2000mm (78.7")
- 1200mm (47.2")
- 2200mm (86.6")
- 1500mm (59")
- 2400mm (94.5")

SUSPENSION LENGTH

We provide standard lengths that your installer cuts-down to a final size on-site during installation

MOUNTING STYLE

- Canopy
- Cups (Remote Driver)

WOOD FINISH

- Nörska natural beeswax
- Bleached
- Stained-Blackened
- Flame-Blackened

HARDWARE FINISH

- Powder Coat White
- Brushed Stainless Steel
- Polished Natural Brass
- Black Anodized Aluminum

CORD FINISH

- Black Cotton SVT
- White Cotton SVT

END STYLE

SQUARE, CHA - 009

OVAL, CHA - 010

ELECTRICAL

COLOR TEMPERATURE

- 2700K
- 3000K

WATTAGE

32 W/m (9.76 W/ft)

LUMEN OUTPUT

2640 lm/m (804 lm/ft)

VOLTAGE

100VAC - 277VAC

DIMMING

TRIAC Phase-Cut
Optional: Bluetooth, Wi-Fi

CRI

95

CERTIFICATION






UPP-NERR ÅTTA

CHA - 009, CHA - 010


PRODUCT DESCRIPTION

Upp-Nerr is Swedish for “up” and “down,” named after its clever combination of up and down light casting. This chandelier is crafted at 80mm tall by 40mm wide, and masterfully blends ambiance and direct lighting for both residential and commercial spaces. Beautifully effective as a standalone fixture, Upp-Nerr warmly illuminates surfaces below while delicately showering the surroundings with a soft, vertical glow.

CANOPY MOUNTING HARDWARE DIAGRAM

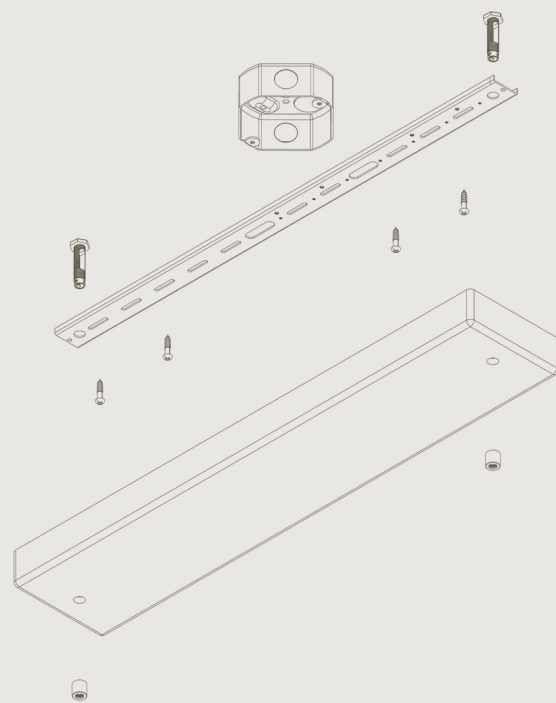

DIMENSIONAL DRAWING

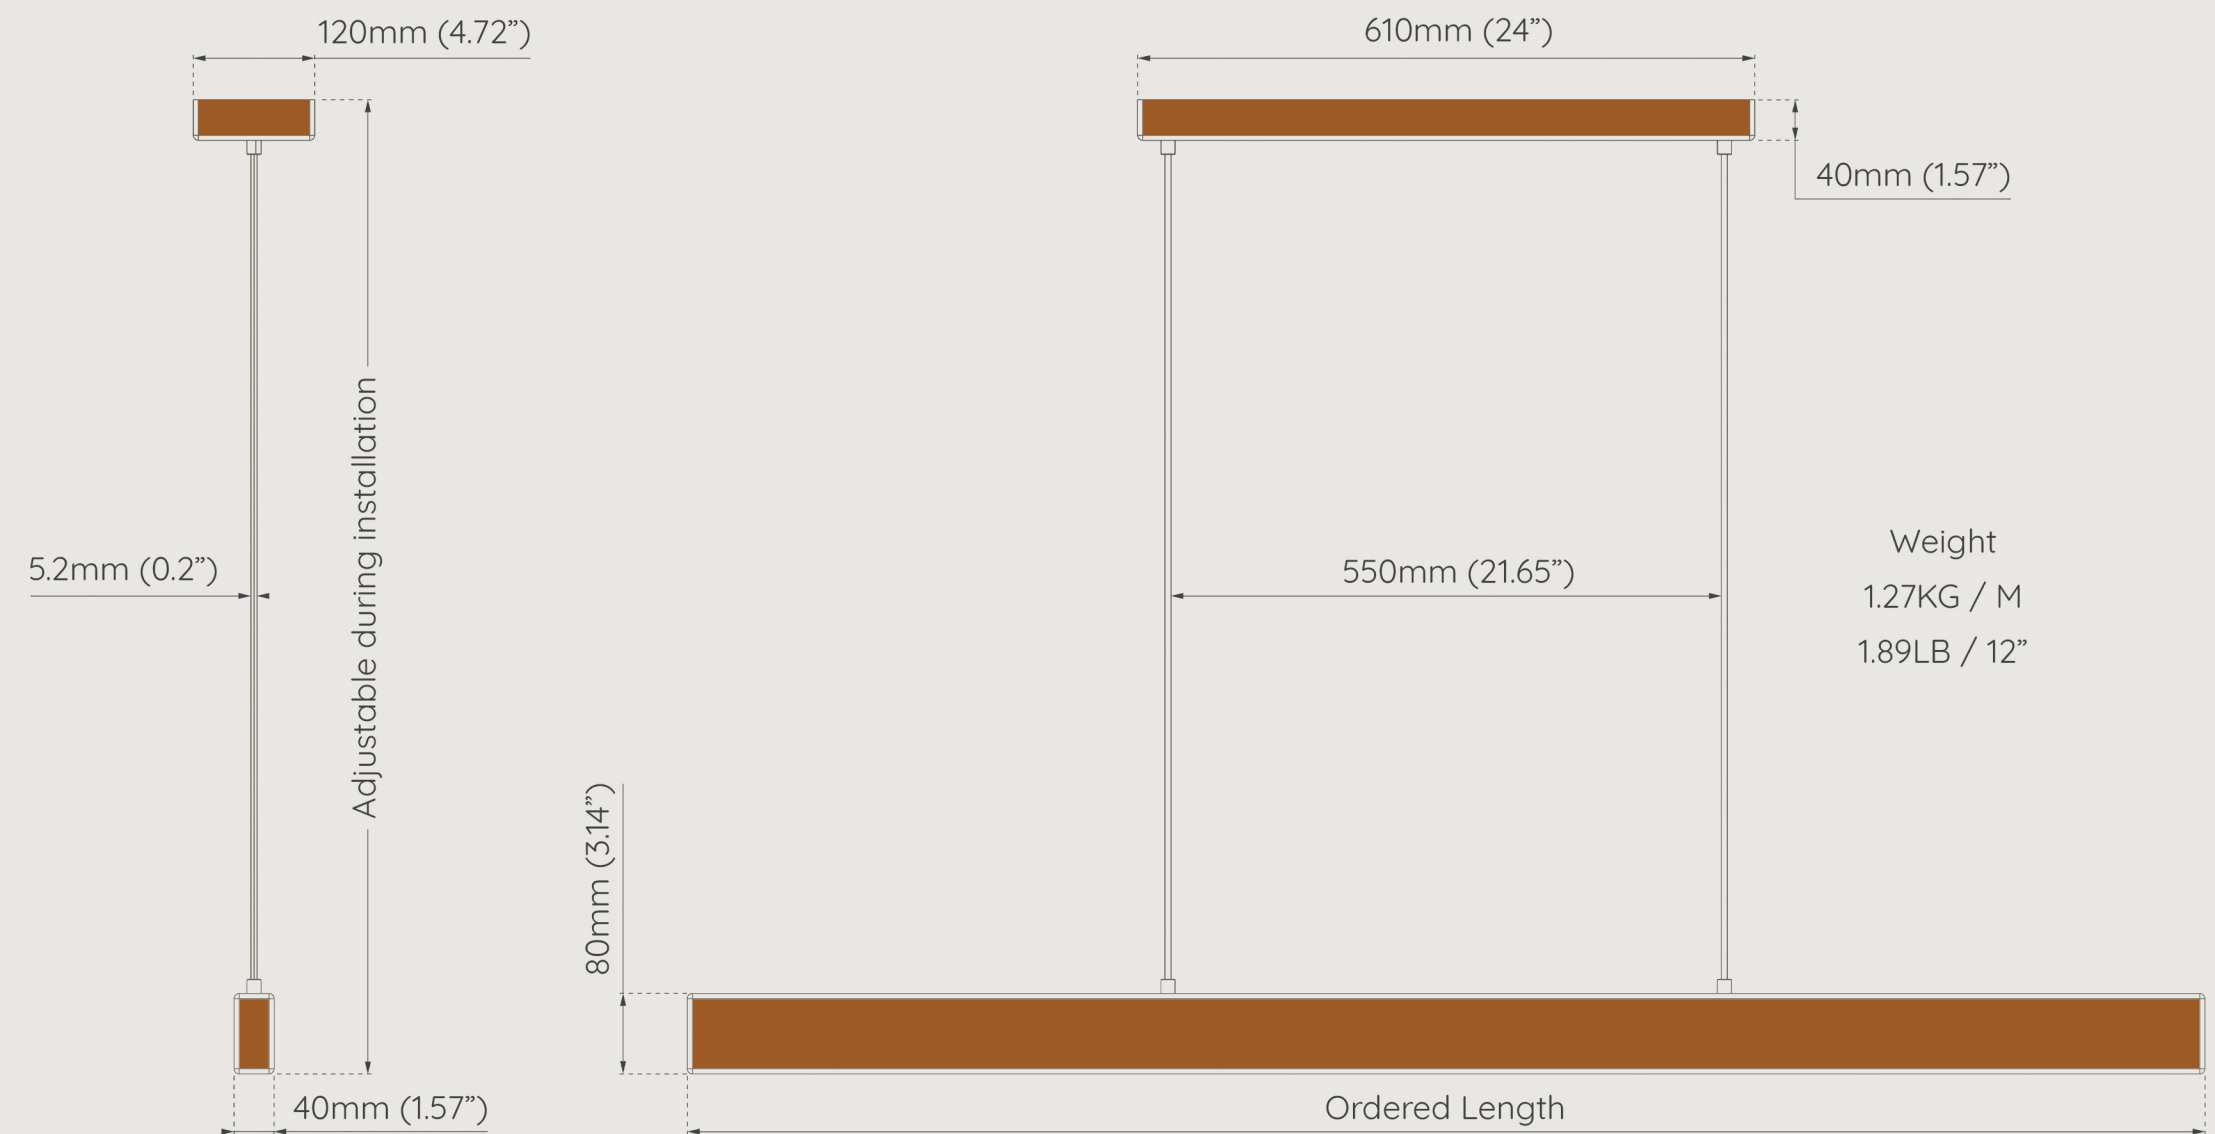

PRODUCT OPTIONS

WOOD TYPE

- White Oak
- Cherry
- Ash
- Walnut
- Hard Maple

LENGTH

- 800mm (31.5")
- 1000mm (39.4")
- 1200mm (47.2")
- 1500mm (59")
- 1800mm (71")
- 2000mm (78.7")
- 2200mm (86.6")
- 2400mm (94.5")

SUSPENSION LENGTH

We provide standard lengths that your installer cuts-down to a final size on-site during installation

MOUNTING STYLE

- Canopy
- Cups (Remote Driver)

WOOD FINISH

- Nörska natural beeswax
- Bleached
- Stained-Blackened
- Flame-Blackened

HARDWARE FINISH

- Powder Coat White
- Brushed Stainless Steel
- Polished Natural Brass
- Black Anodized Aluminum

CORD FINISH

- Black Cotton SVT
- White Cotton SVT

END STYLE

SQUARE, CHA - 009

OVAL, CHA - 010

ELECTRICAL

COLOR TEMPERATURE

- 2700K
- 3000K

LUMEN OUTPUT

2640 lm/m (804 lm/ft)

DIMMING

TRIAC Phase-Cut
Optional: Bluetooth, Wi-Fi

WATTAGE

32 W/m (9.76 W/ft)

VOLTAGE

100VAC - 277VAC

CRI

95

CERTIFICATION

