



KÄRV

CHA - 011

CUT SHEET

Revision number : #2
Revision date : 15 May 2026





Description

Kärv is a low-profile linear pendant crafted from solid hardwood, with a recessed diffuser that sets light quietly along the lower edge. Its simple form emphasizes the uninterrupted character of the timber while creating an even, restrained wash of illumination.

Product Specifications

Wood Finishes

Available in All Standard Wood Finishes

Cord Finishes

Available in All Standard Cord Finishes

Length

- 31.5” (800mm)
- 39.4” (1000mm)
- 47.2” (1200mm)
- 59” (1500mm)
- 71” (1800mm)
- 78.7” (2000mm)
- 86.6” (2200mm)
- 94.5” (2400mm)

Metal Finishes

Available in All Standard Metal Finishes

Mounting Options

- Continuous Canopy
- Dual Canopy (Remote Driver)

Cord Length

We provide standard lengths that your installer cuts-down to a final size on-site during installation

Material Disclaimer

Due to the natural characteristics of solid hardwood, grain and tone variation will occur. Each fixture is unique.

Electrical

Input Voltage 100VAC - 277VAC	CCT Options 2700K, 3000K, Custom	Delivered Lumens 402Lm/ft (1320Lm/M)
Wattage 4.88W/ft (16W/m)	CRI 95	Dimming TRIAC / ELV / MLV / 0-10v / 1-10v

Electrical Notes


- Universal mounting accommodates standard ceiling junction box conditions unless otherwise noted
- Remote drivers, when used, must remain accessible for service and installed in accordance with local electrical code
- For remote driver layout, wire gauge, or maximum driver distance guidance, contact support@NorskaUSA.com
- Dimming compatibility varies by driver type and fixture configuration; refer to the dimming options specified for each fixture
- Fixture to be installed by a qualified electrician in accordance with local electrical code
- Projected L70: 70,000 hours




KÄRV

CHA - 011

Continuous Canopy Dimensional Drawing

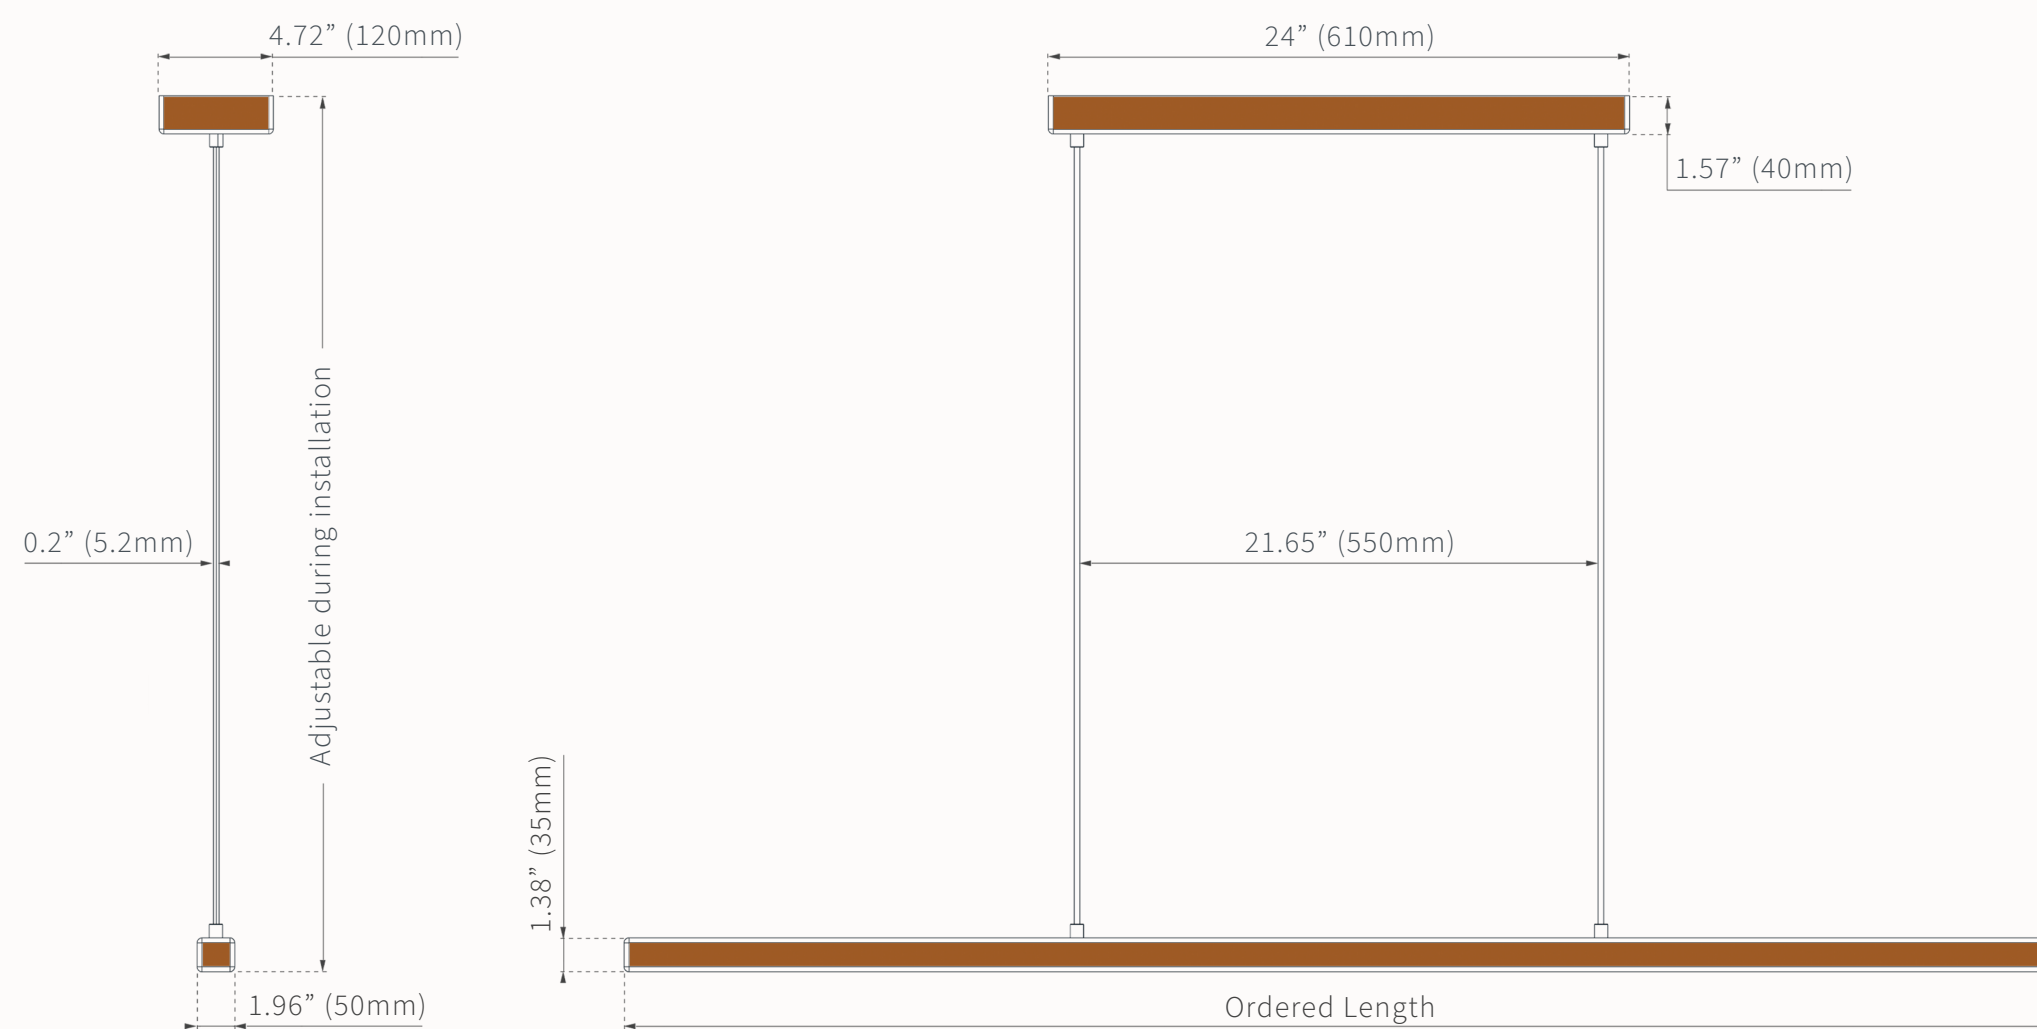

Continuous Canopy Hardware Diagram

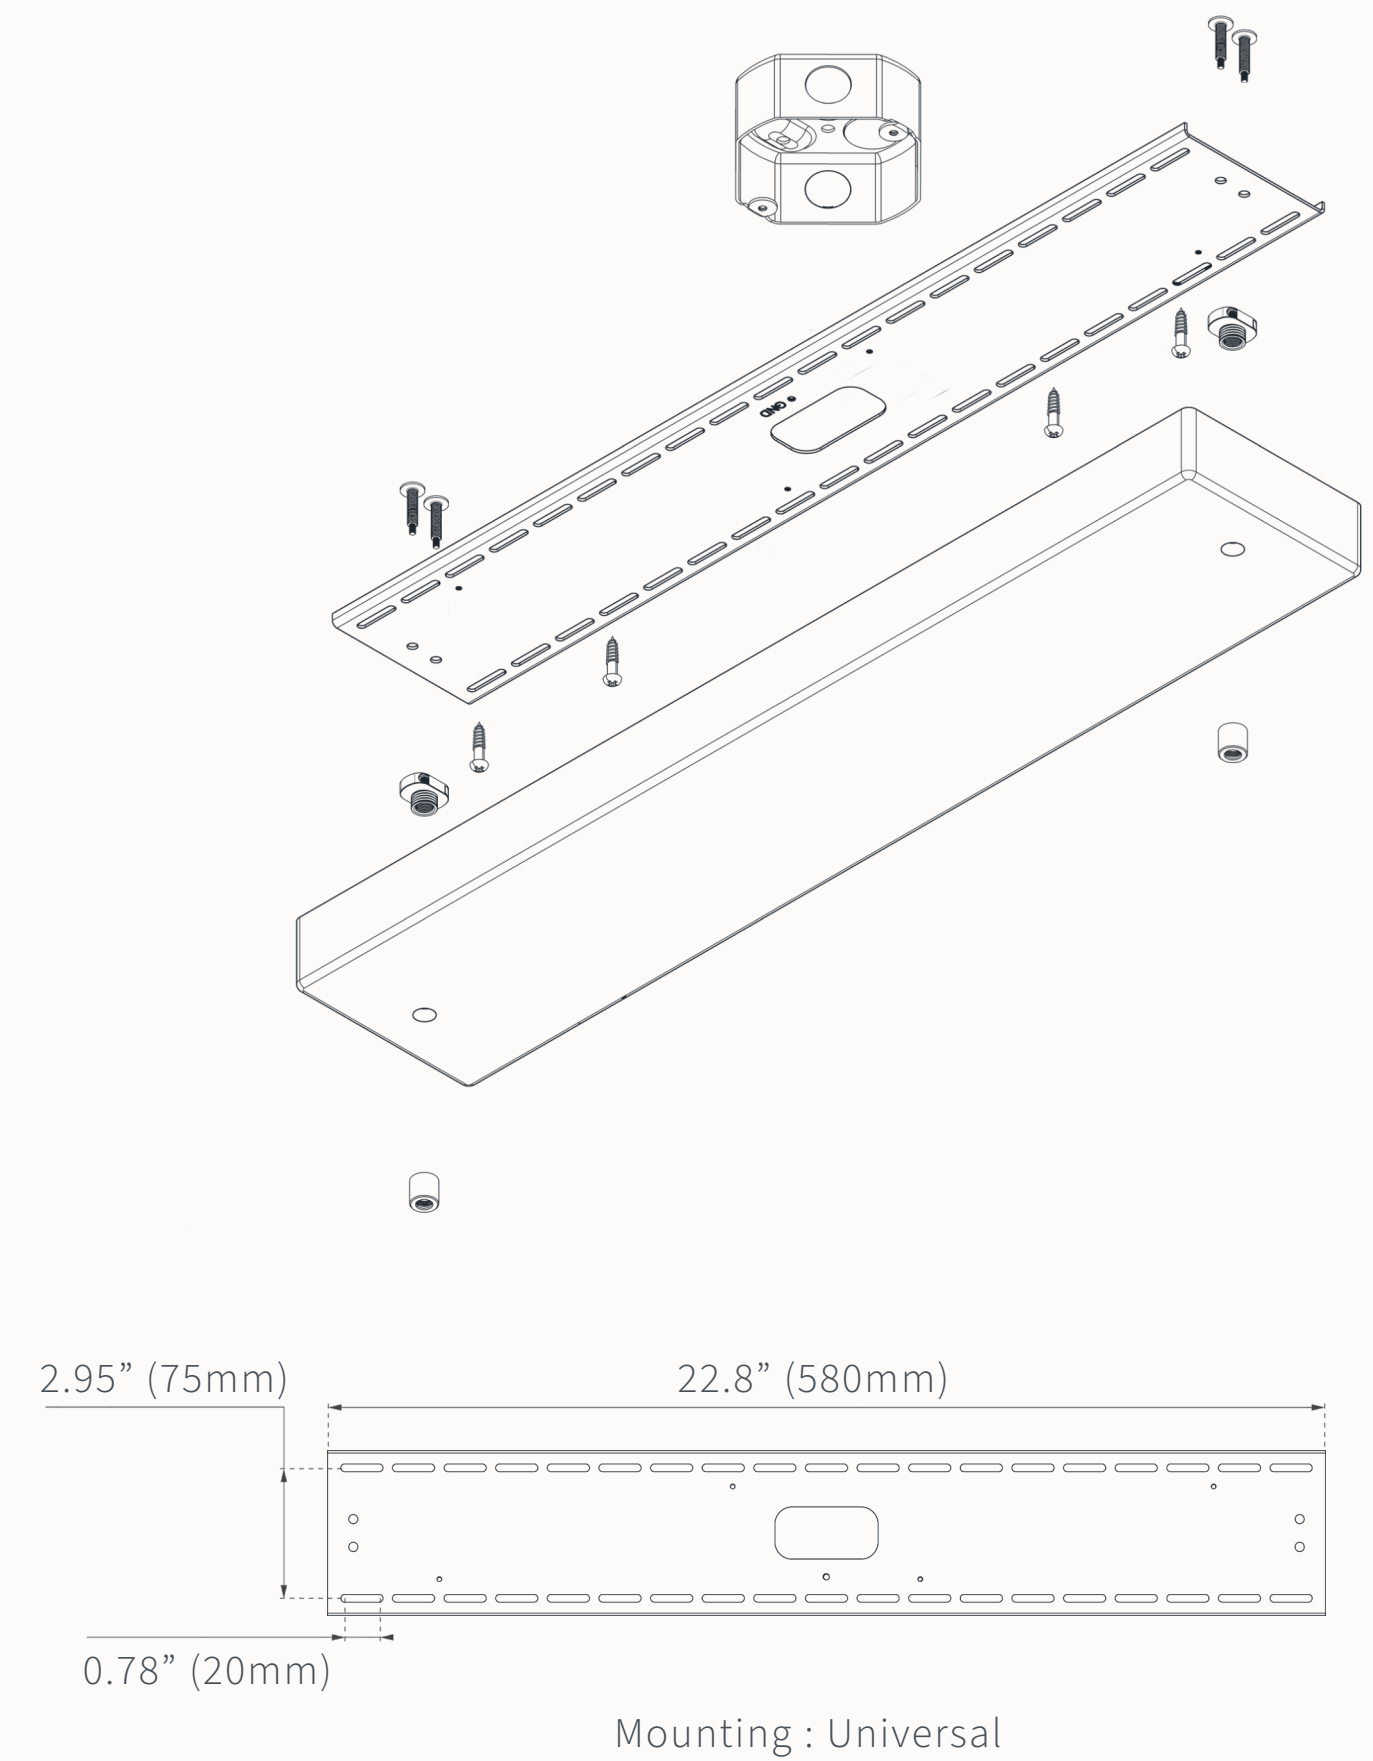




Dual Canopy Dimensional Drawing


Electrical / Mounting Note

For dual-canopy configurations, a remote driver is required. 24VDC power is required at one canopy only; the second canopy is non-powered and functions as a support mount unless otherwise specified. Custom canopy/cord spacing is available upon request.

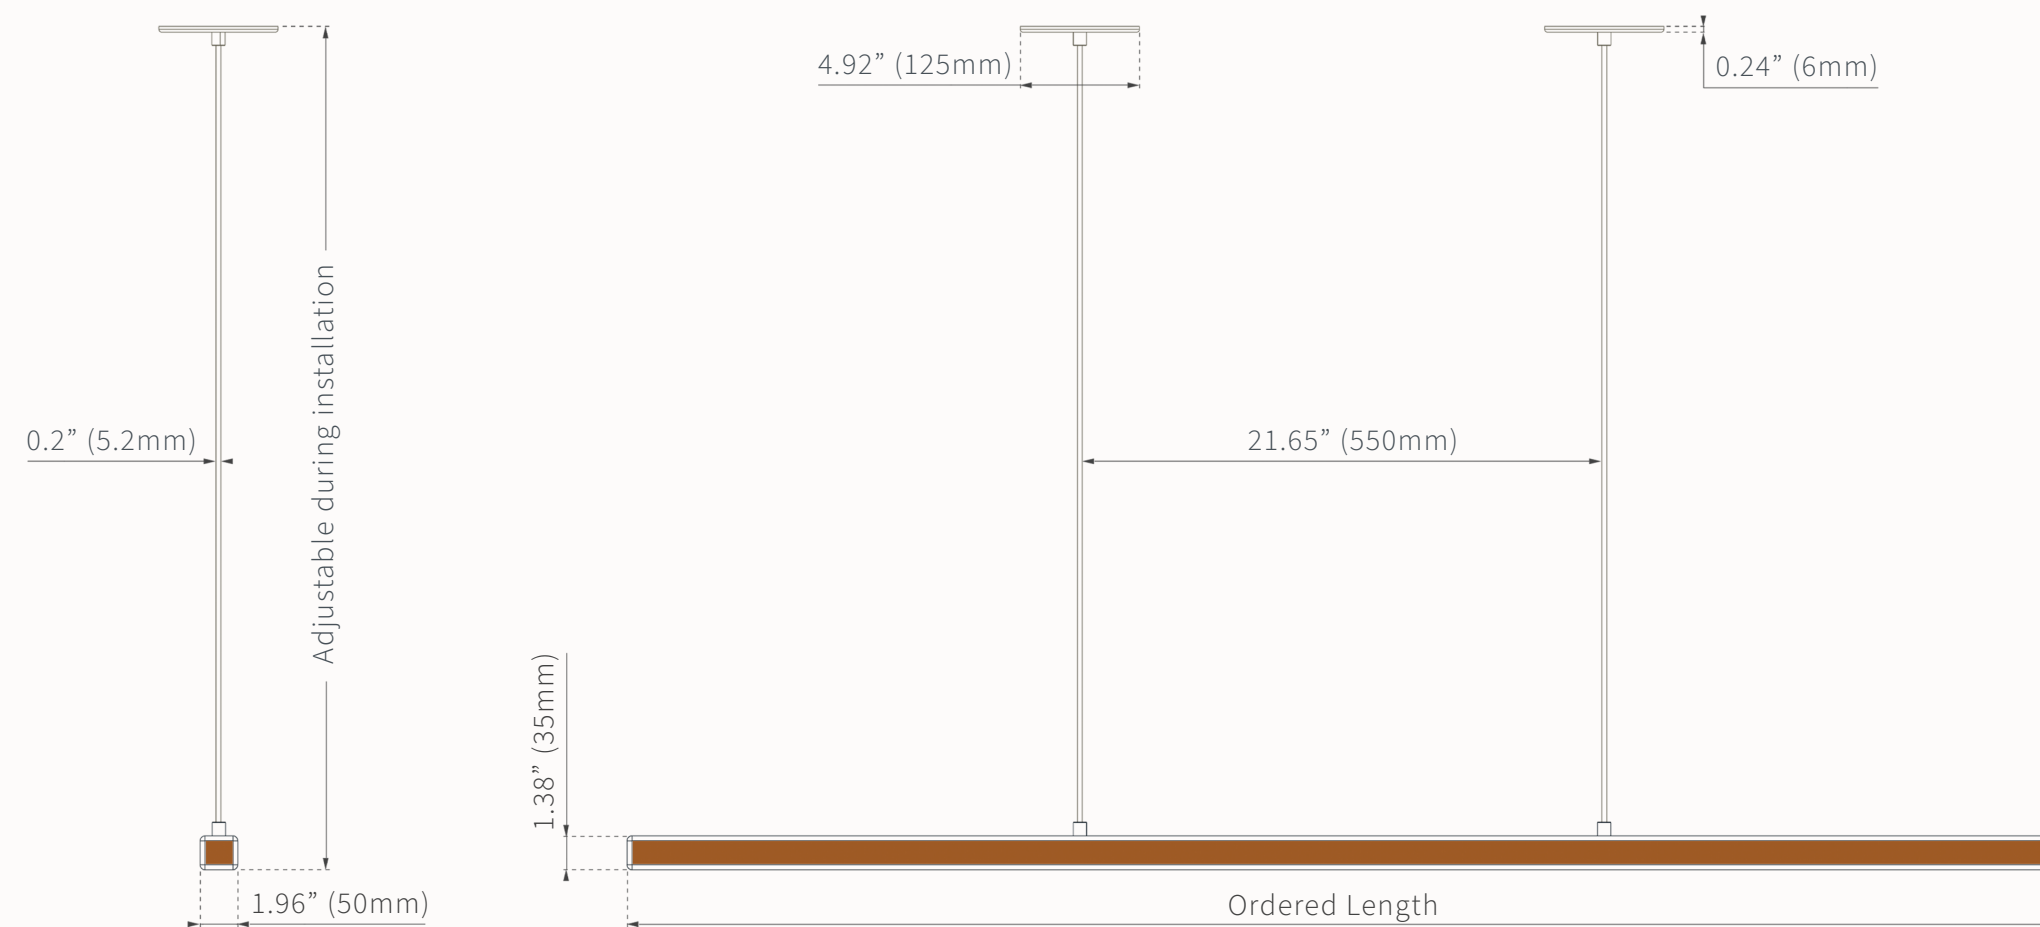

Remote driver is required for this mounting style and is provided with the fixture.

Dual Canopy Hardware Diagram

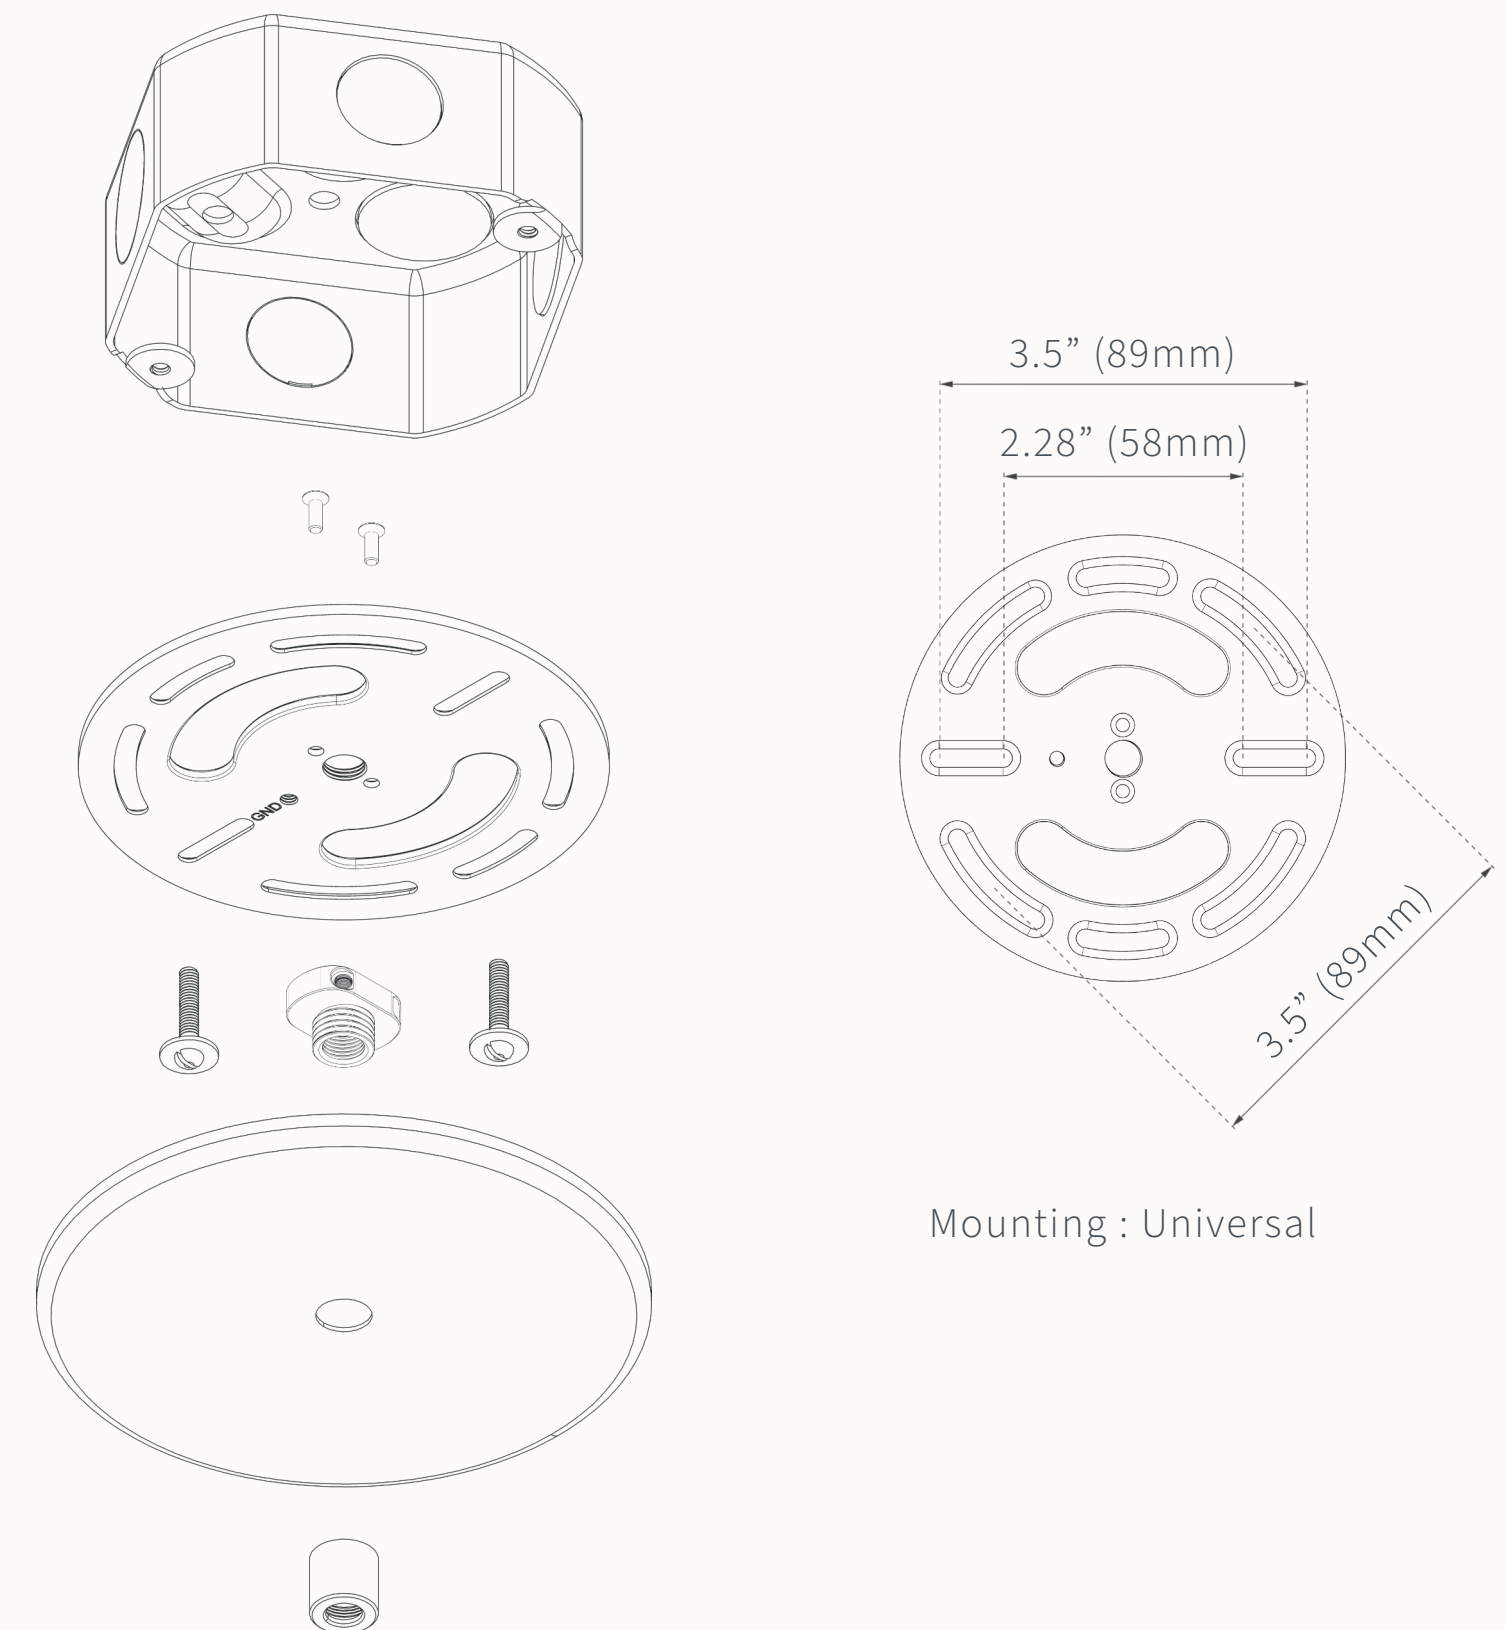



Performance Table

Length	Wattage	Delivered Lumens	Weight
31.5"(80cm)	12.8W	1056LM	2.3 LB / 1.1 KG
39.4"(100cm)	16W	1320LM	3.0 LB / 1.4 KG
47.2"(120cm)	19.2W	1584LM	3.6 LB / 1.7 KG
59"(150cm)	24W	1980LM	4.5 LB / 2.0 KG
71"(180cm)	28.8W	2376LM	5.3 LB / 2.4 KG
78.7"(200cm)	32W	2640LM	6.0 LB / 2.7 KG
86.6"(220cm)	35.2	2904LM	6.4 LB / 2.9 KG
94.5"(240cm)	38.4W	3168LM	7.1 LB / 3.2 KG

Compliance & Certifications

Dry / Damp Locations, cULus Certified





Ordering Information

SKU Structure

[C][H][A] - [0][1][1] - [C][C][C] - [D][D][D] - [N][T][X] - [F][F][F] - [G][G][G] - [H][H][H] - [I][I][I] - [J][J][J] - [K][K][K] - [L][L][L]

Options per Catagory

LENGTH - CCC

Length in cm (ie 59" (150cm))

MOUNTING - DDD

- Dual Canopy [C][U][P]
- Continuous Canopy [C][A][N]

TEXTURE - EEE

No Texture available [N][T][X]

CANOPY FINISH - FFF

- Black Anodized Aluminum [B][L][K]
- Architectural White [W][H][T]
- Brushed Stainless Steal [B][S][S]
- Matched Wood Finish [M][W][F]

WOOD FINISH - GGG

- Bleached Ash [B][A][S]
- Bleached White Oak [B][W][O]
- Maple [M][A][P]
- Ash [A][S][H]
- White Oak [W][H][O]
- Cherry [C][H][E]
- Walnut [W][A][L]
- Flame Blackened White Oak [F][B][W]
- Blackened Ash [B][L][A]

METAL FINISH - HHH

- Black Anodized Aluminum [B][L][K]
- Architectural White [W][H][T]
- Brushed Stainless Steel [B][S][S]
- Natural Brass [B][R][A]

CORD FINISH - III

- Black Cotton SVT Cord [B][K][C]
- White Cotton SVT Cord [W][H][C]
- Brass Mesh Cord [B][R][M]
- Blackened Brass Mesh Cord [B][B][M]
- Stainless Steel Mesh Cord [S][S][M]

CORD LENGTH - JJJ

Cord length in cm (ie 36" (91cm))

INPUT VOLTAGE - KKK

- 120VAC [1][2][0]
- 240VAC [2][4][0]
- 277VAC [2][7][7]
- 24 VDC [0][2][4]

COLOR TEMPERATURE - LLL

- 2700K [2][7][K]
- 3000K [3][0][K]
- Custom [C][U][S]

Example SKU

[C][H][A] - [0][1][1] - [1][5][0] - [C][U][P] - [N][T][X] - [B][L][K] - [B][W][O] - [B][R][A] - [B][K][C] - [1][1][4] - [1][2][0] - [2][7][K]

Configurator

Define fixture options and generate a complete specification SKU at NorskaUSA.com/configurator.

Custom Requests

For custom dimensions, finishes, mounting conditions, or project-specific requirements, contact Nörska Sales.

24VDC Remote Driver

Fixtures specified with 24VDC input require a remote LED driver. The appropriate remote driver is provided with the fixture and should be installed in an accessible remote location per project requirements.