



# SEKS

CHA - 003 / CHA - 004

CUT SHEET

Revision number : #2  
Revision date : 15 May 2026





### Description

Seks builds on the restrained language of Fyra with a taller 60mm solid-hardwood body, adding subtle depth and material presence to the minimalist linear form. Its clean profile emphasizes the natural grain of the timber while delivering an even wash of light along the lower edge.

### Product Specifications

#### Wood Finishes

Available in All Standard Wood Finishes

#### Metal Finishes

Available in All Standard Metal Finishes

#### Cord Finishes

Available in All Standard Cord Finishes

#### Mounting Options

- Continuous Canopy
- Dual Canopy

#### Lengths

- 31.5" (800mm)
- 39.4" (1000mm)
- 47.2" (1200mm)
- 59" (1500mm)
- 71" (1800mm)
- 78.7" (2000mm)
- 86.6" (2200mm)
- 94.5" (2400mm)

#### Cord Lengths

We provide standard lengths that your installer cuts-down to a final size on-site during installation

#### End Style

SQUARE, CHA - 003

OVAL, CHA - 004

### Material Disclaimer

Due to the natural characteristics of solid hardwood, grain and tone variation will occur. Each fixture is unique.

### Electrical

#### Input Voltage

100VAC - 277VAC

#### CCT Options

2700K, 3000K, Custom

#### Delivered Lumens

402Lm/ft (1320Lm/M)

#### Wattage

4.88W/ft (16W/m)

#### CRI

95

#### Dimming


TRIAC / ELV / MLV / 0-10v / 1-10v

### Electrical Notes


- Universal mounting accommodates standard ceiling junction box conditions unless otherwise noted
- Remote drivers, when used, must remain accessible for service and installed in accordance with local electrical code
- For remote driver layout, wire gauge, or maximum driver distance guidance, contact support@NorskaUSA.com
- Dimming compatibility varies by driver type and fixture configuration; refer to the dimming options specified for each fixture
- Fixture to be installed by a qualified electrician in accordance with local electrical code
- Projected L70: 70,000 hours



## Continuous Canopy Dimensional Drawing

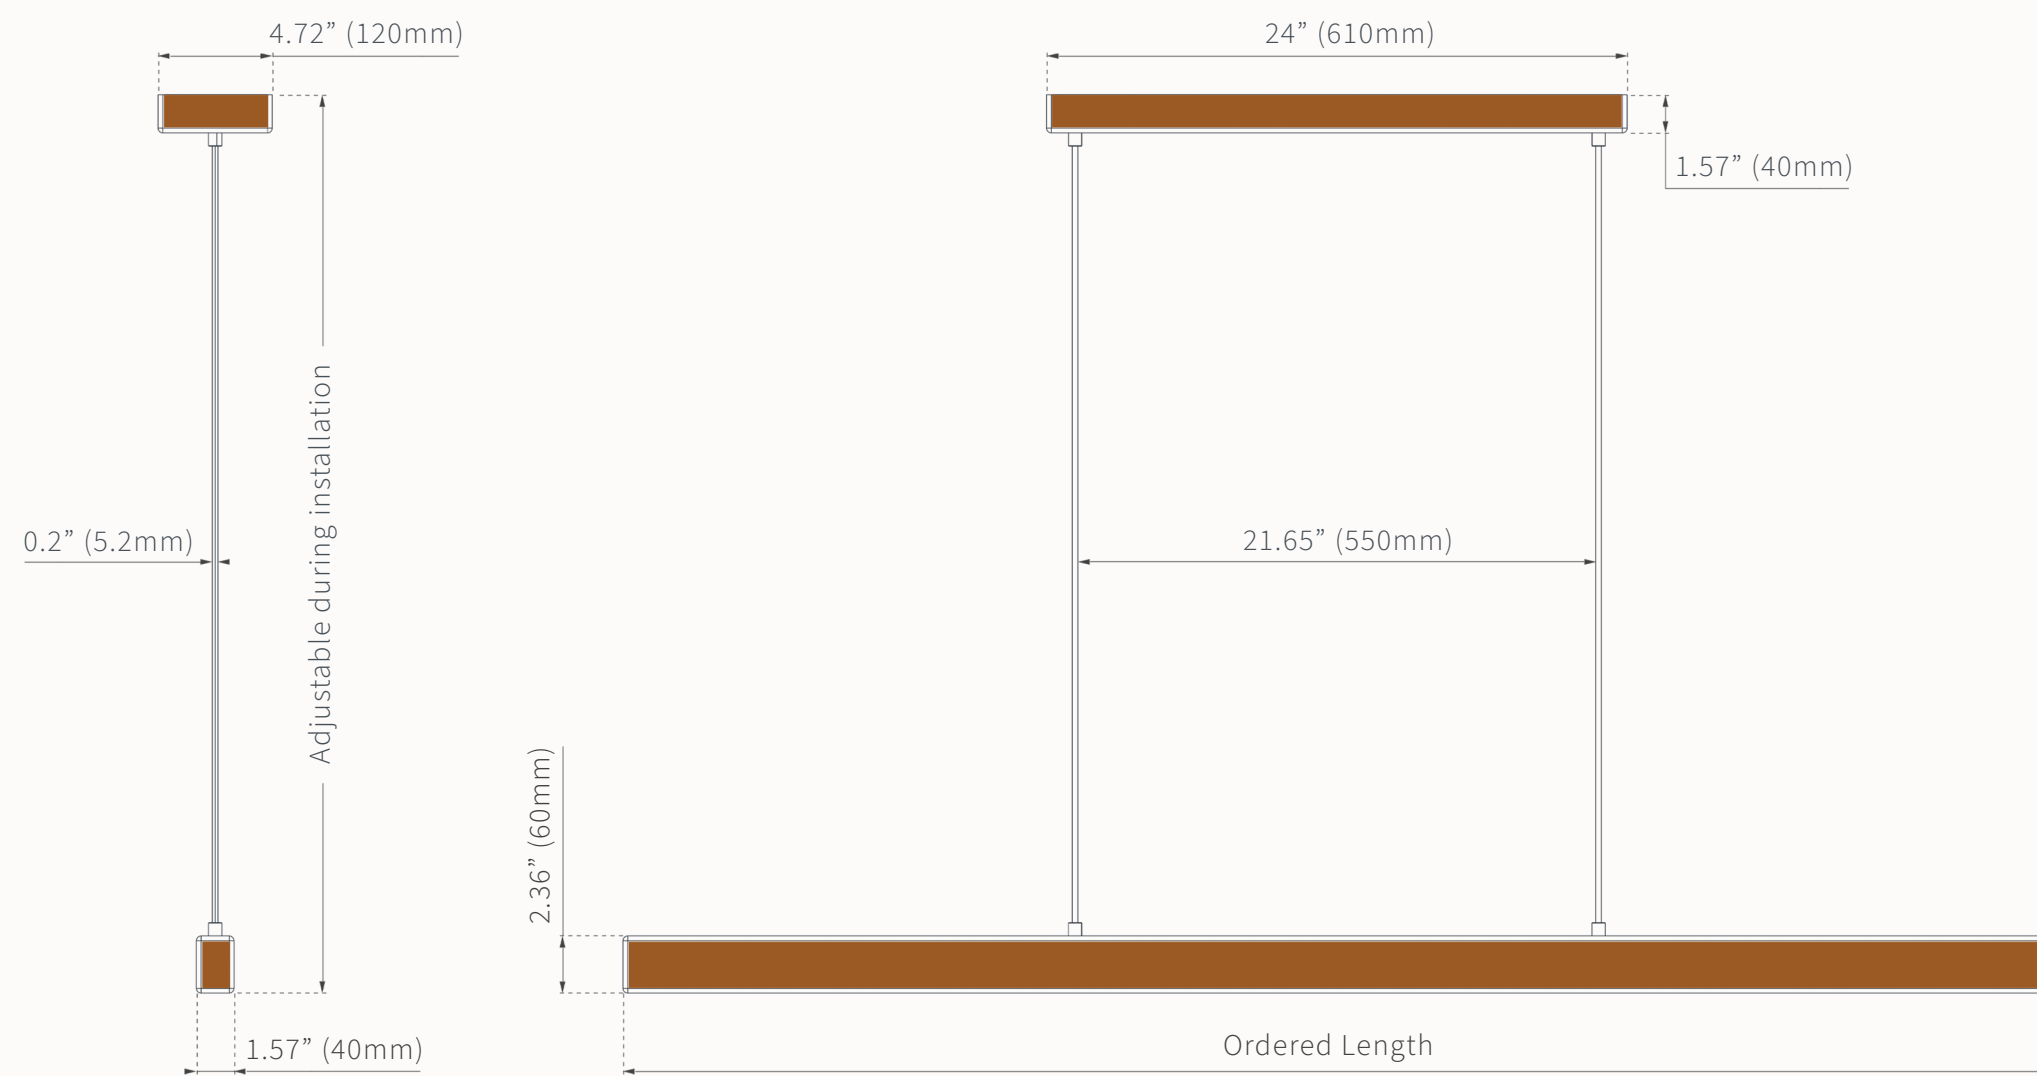

## Continuous Canopy Hardware Diagram

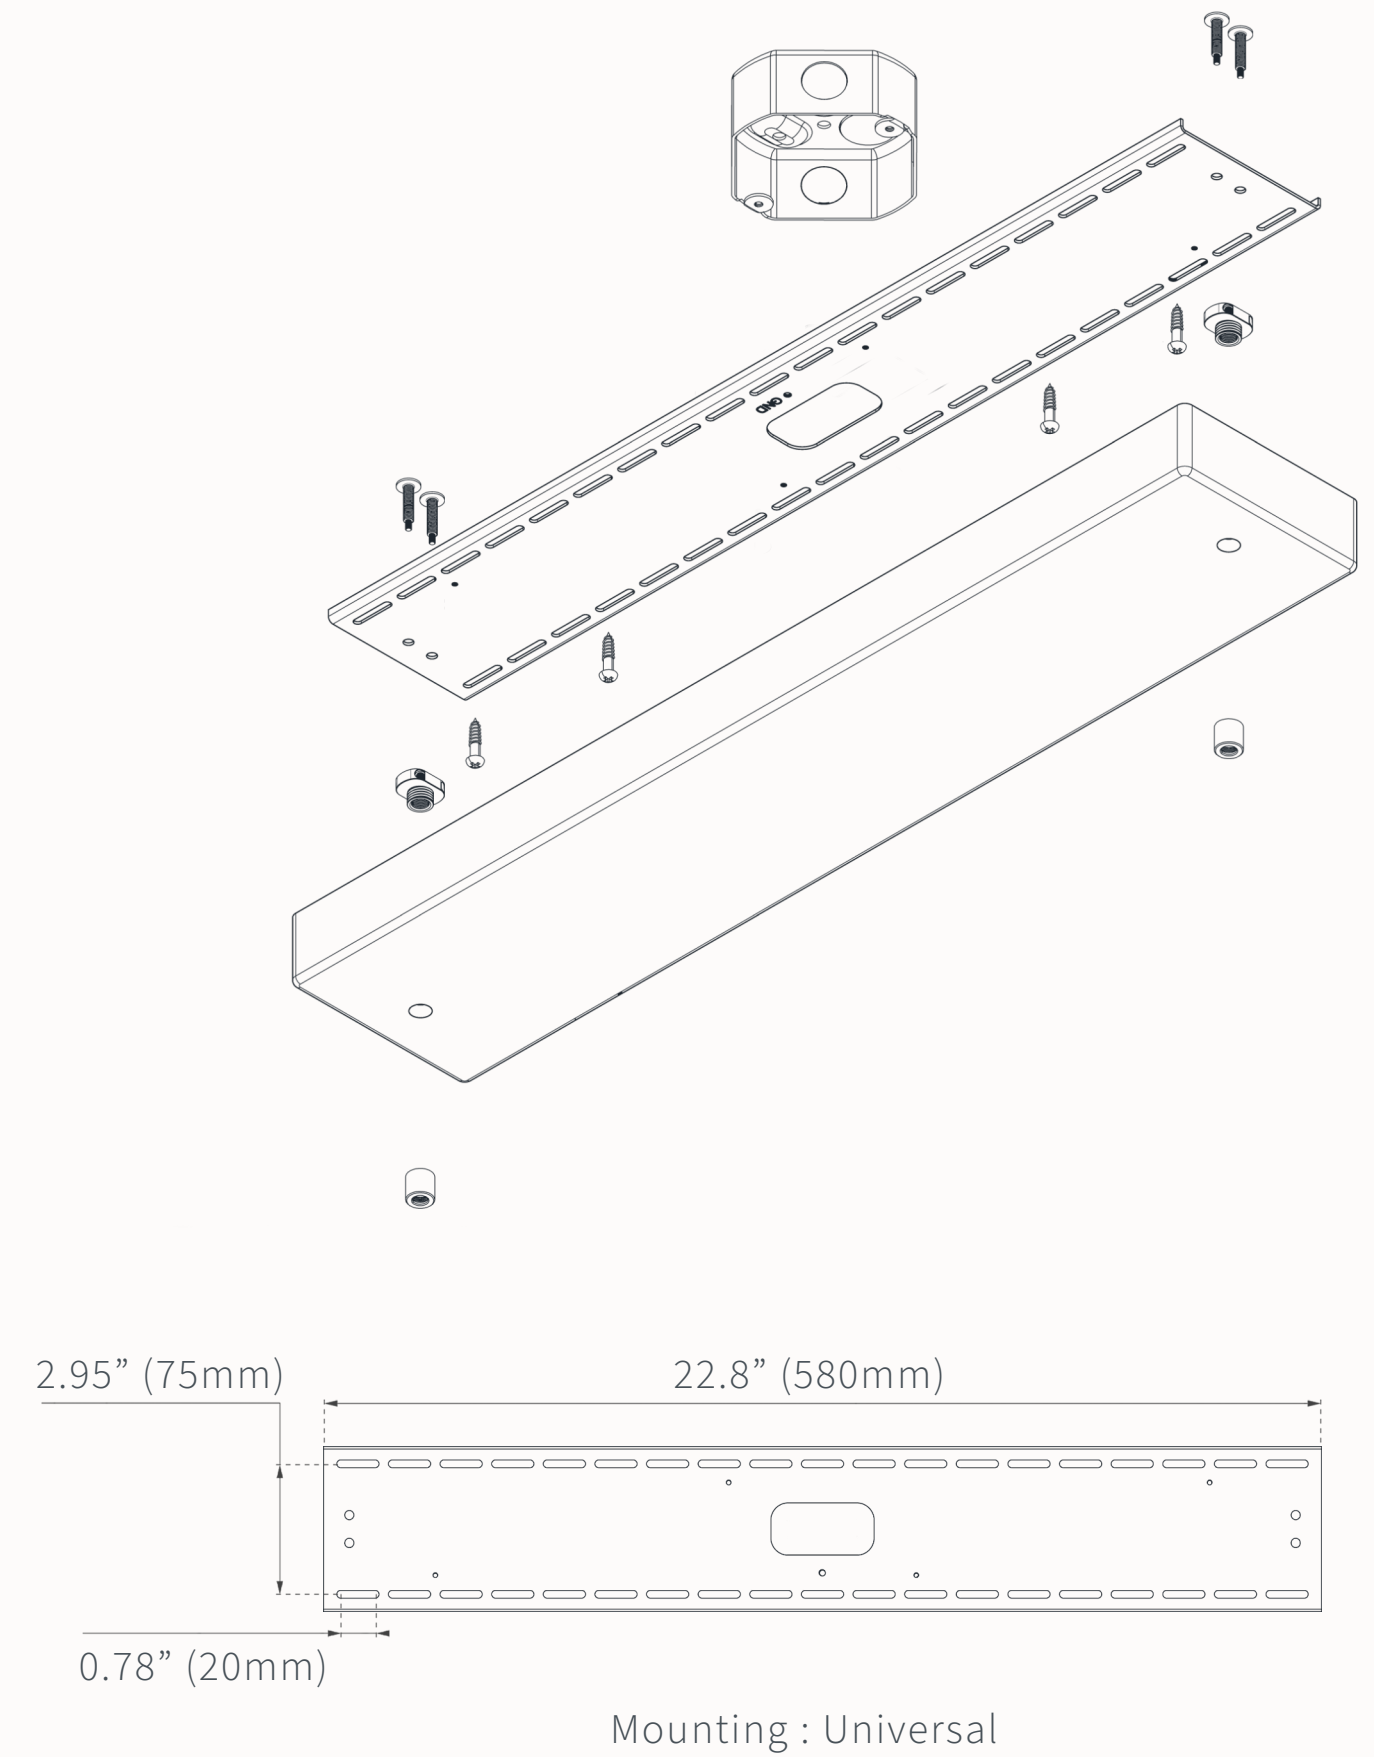





## Dual Canopy Dimensional Drawing

### Electrical / Mounting Note

In dual-canopy configurations, line voltage power is required at one canopy only; the second canopy is non-powered and functions as a support mount unless otherwise specified. Custom canopy/cord spacing is available upon request.

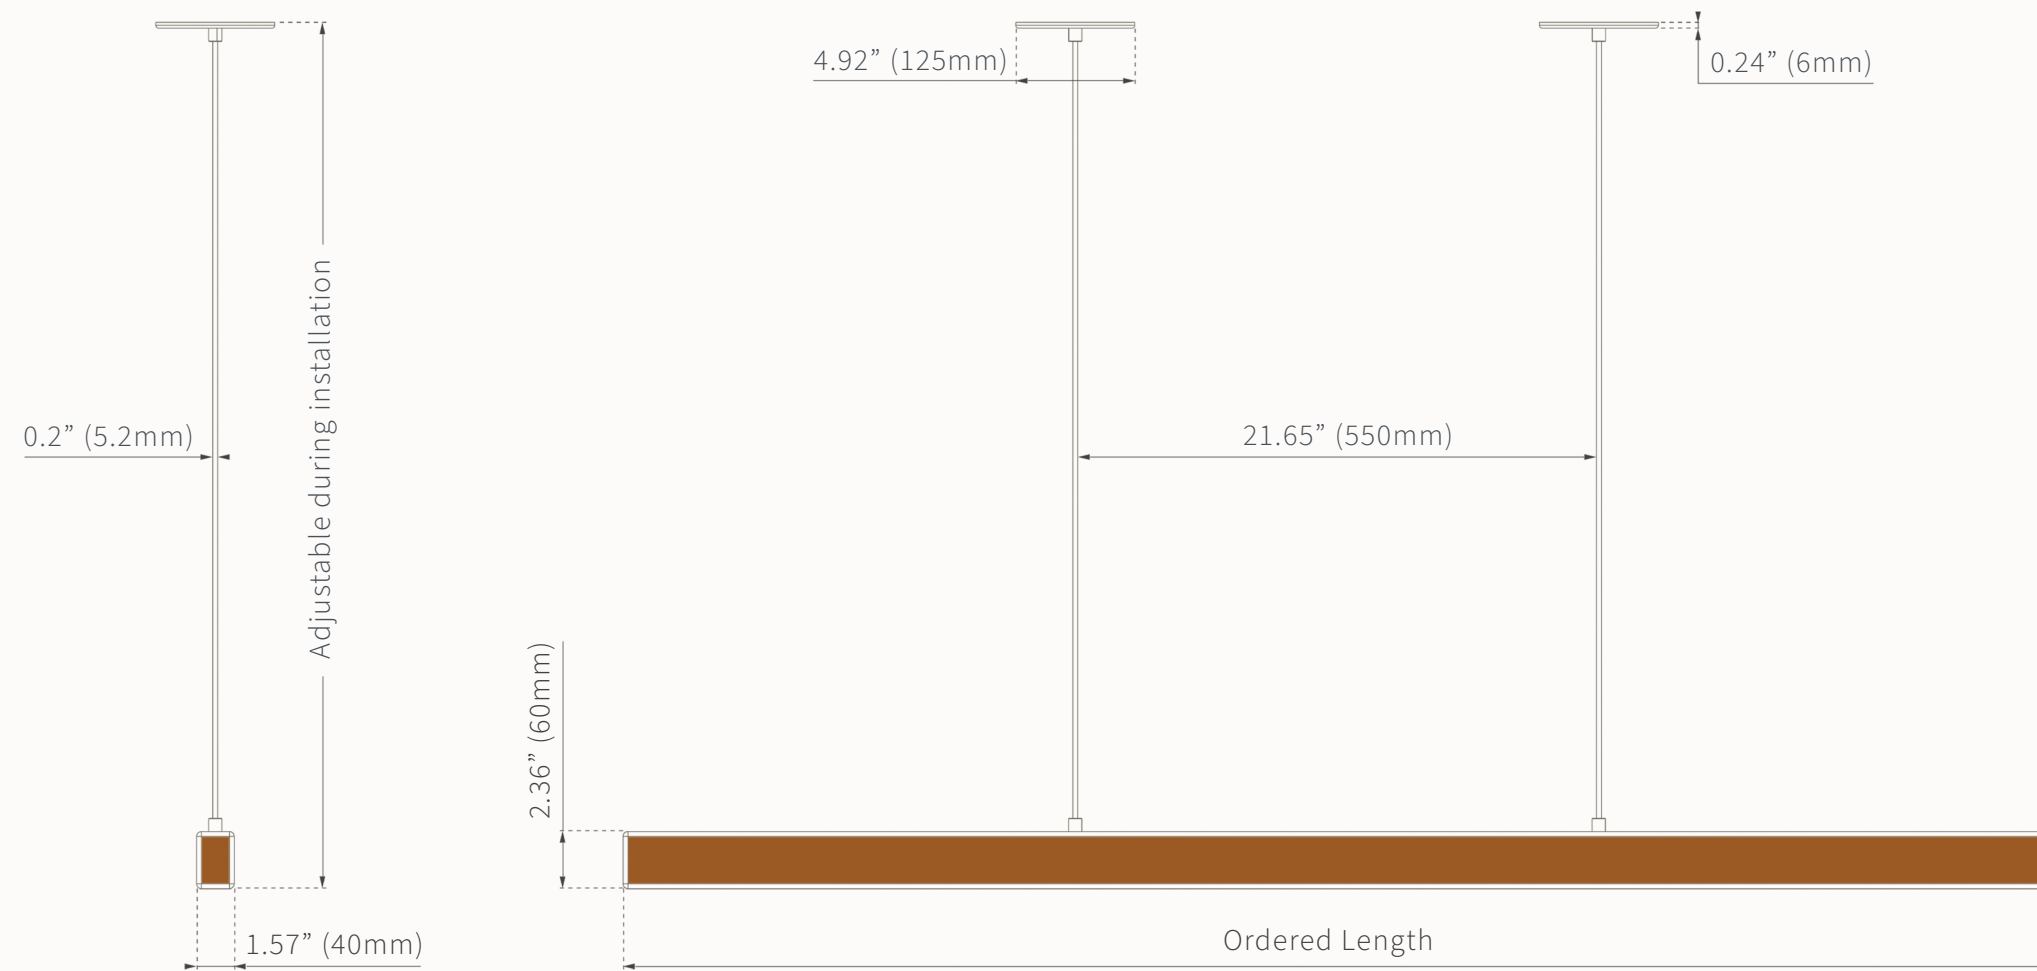

## Dual Canopy Hardware Diagram

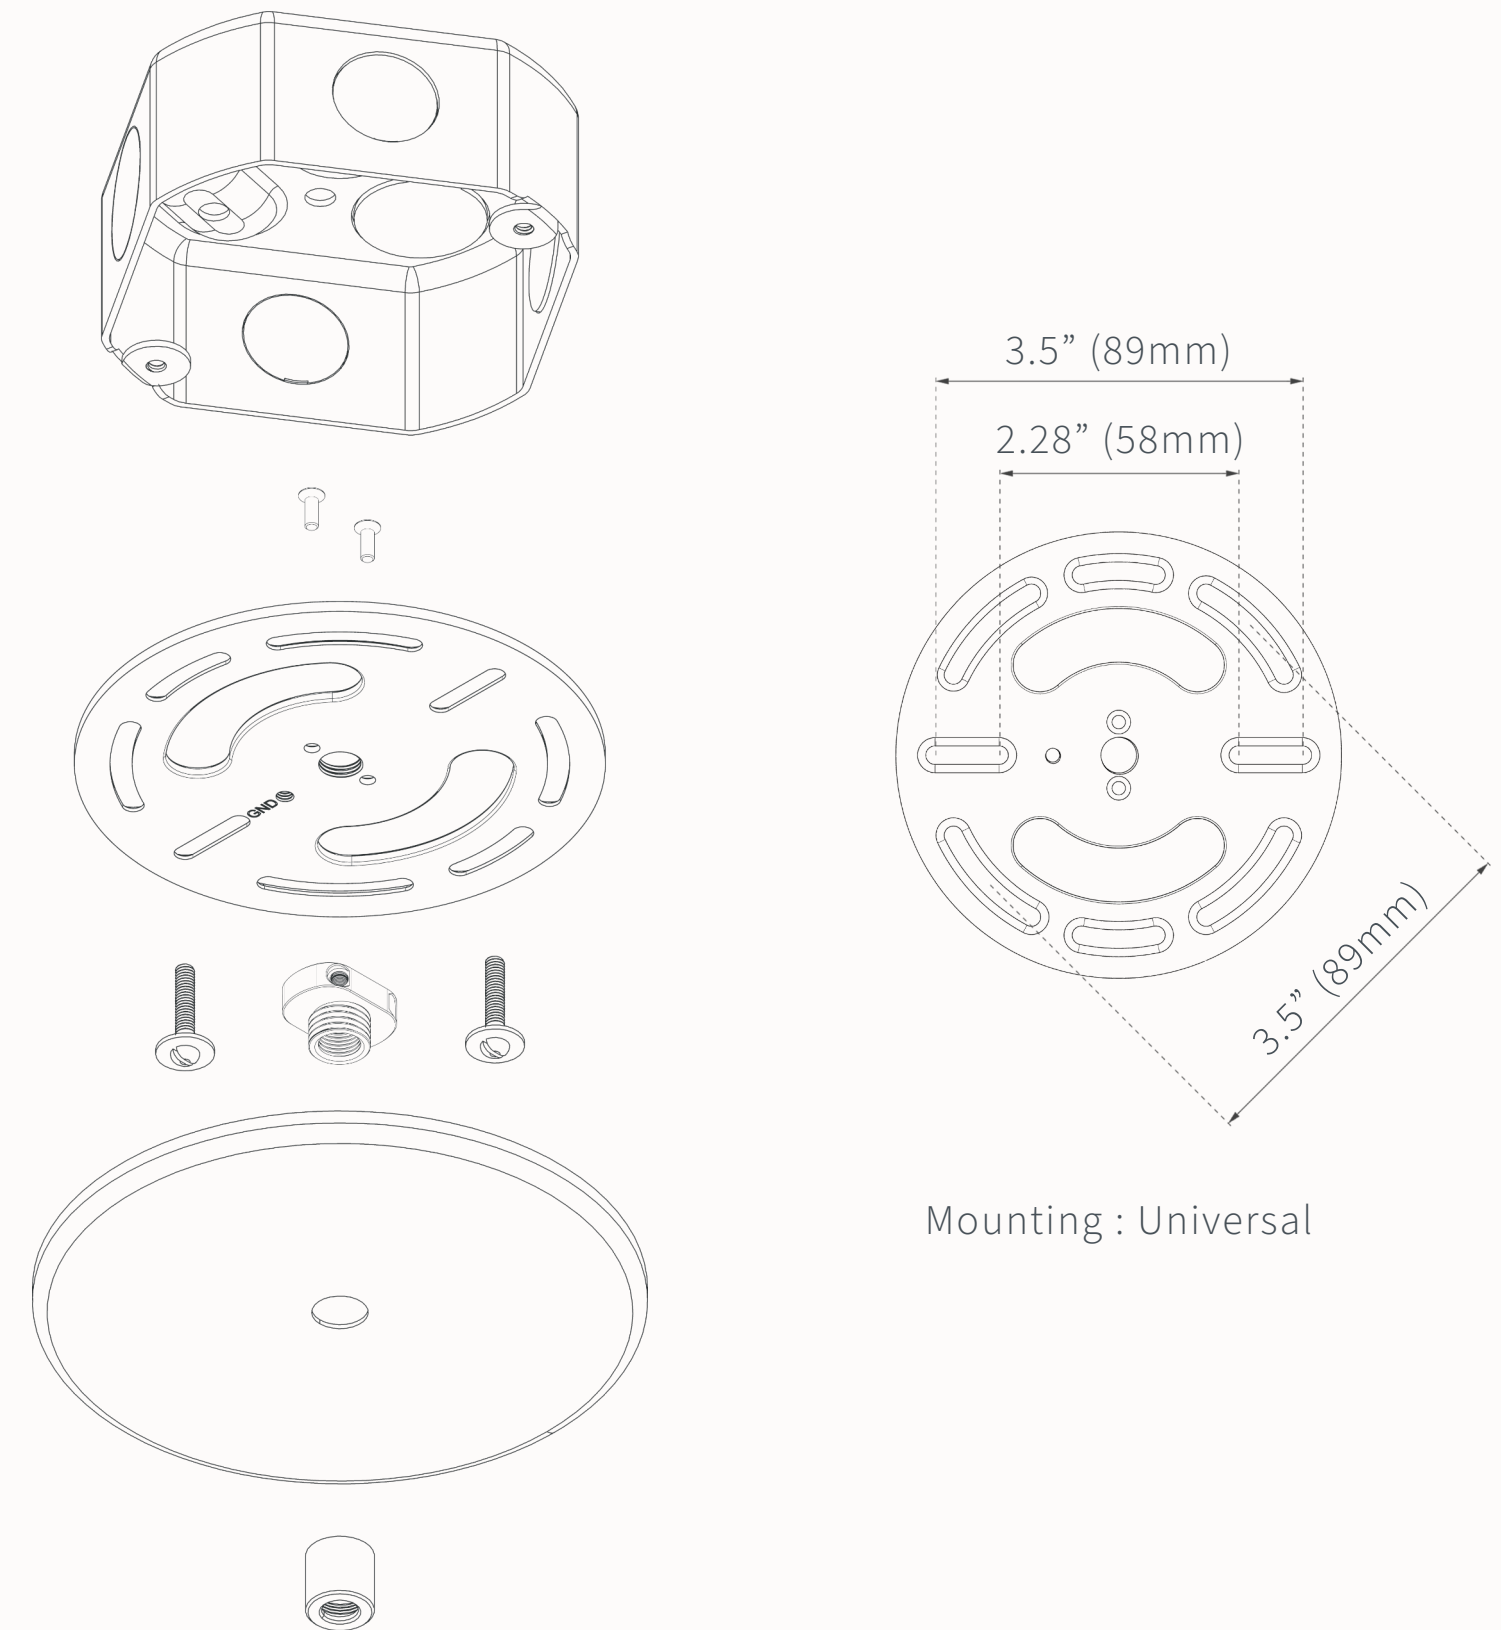



## Performance Table

Length	Wattage	Delivered Lumens	Weight
31.5"(80cm)	12.8W	1056LM	3.2 LB / 1.5 KG
39.4"(100cm)	16W	1320LM	4.1 LB / 1.9 KG
47.2"(120cm)	19.2W	1584LM	4.9 LB / 2.3 KG
59"(150cm)	24W	1980LM	6.1 LB / 2.8 KG
71"(180cm)	28.8W	2376LM	7.3 LB / 3.3 KG
78.7"(200cm)	32W	2640LM	8.3 LB / 3.7 KG
86.6"(220cm)	35.2	2904LM	8.8 LB / 4.0 KG
94.5"(240cm)	38.4W	3168LM	9.7 LB / 4.4 KG

## Compliance & Certifications

Dry / Damp Locations, cULus Certified





### Ordering Information

#### SKU Structure

CHA - BBB - CCC - DDD - NTX - FFF - GGG - HHH - III - JJJ - KKK - LLL

#### Options per Category

##### DESIGN - BBB

- Seks Square 

0	0	3
---	---	---
- Seks Oval 

0	0	4
---	---	---

##### LENGTH - CCC

Length in cm (ie 59" (150cm))

##### MOUNTING - DDD

- Dual Canopy 

C	U	P
---	---	---
- Continuous Canopy 

C	A	N
---	---	---

##### TEXTURE - EEE

No Texture available 

N	T	X
---	---	---

##### CANOPY FINISH - FFF

- Black Anodized Aluminum 

B	L	K
---	---	---
- Architectural White 

W	H	T
---	---	---
- Brushed Stainless Steel 

B	S	S
---	---	---
- Matched Wood Finish 

M	W	F
---	---	---

##### WOOD FINISH - GGG

- Bleached Ash 

B	A	S
---	---	---
- Bleached White Oak 

B	W	O
---	---	---
- Maple 

M	A	P
---	---	---
- Ash 

A	S	H
---	---	---
- White Oak 

W	H	O
---	---	---
- Cherry 

C	H	E
---	---	---
- Walnut 

W	A	L
---	---	---
- Flame Blackened White Oak 

F	B	W
---	---	---
- Blackened Ash 

B	L	A
---	---	---

##### METAL FINISH - HHH

- Black Anodized Aluminum 

B	L	K
---	---	---
- Architectural White 

W	H	T
---	---	---
- Brushed Stainless Steel 

B	S	S
---	---	---
- Natural Brass 

B	R	A
---	---	---

##### CORD FINISH - III

- Black Cotton SVT Cord 

B	K	C
---	---	---
- White Cotton SVT Cord 

W	H	C
---	---	---
- Brass Mesh Cord 

B	R	M
---	---	---
- Blackened Brass Mesh Cord 

B	B	M
---	---	---
- Stainless Steel Mesh Cord 

S	S	M
---	---	---

##### CORD LENGTH - JJJ

Cord length in cm (ie 36" (91cm))

##### INPUT VOLTAGE - KKK

- 120VAC 

1	2	0
---	---	---
- 240VAC 

2	4	0
---	---	---
- 277VAC 

2	7	7
---	---	---
- 24 VDC 

0	2	4
---	---	---

##### COLOR TEMPERATURE - LLL

- 2700K 

2	7	K
---	---	---
- 3000K 

3	0	K
---	---	---
- Custom 

C	U	S
---	---	---

#### Example SKU

CHA - 003 - 150 - CUP - NTX - BLK - BWO - BRA - BKC - 114 - 120 - 27K

#### Configurator

Define fixture options and generate a complete specification SKU at [NorskaUSA.com/configurator](http://NorskaUSA.com/configurator).

#### Custom Requests

For custom dimensions, finishes, mounting conditions, or project-specific requirements, contact Nörska Sales.

#### 24VDC Remote Driver

Fixtures specified with 24VDC input require a remote LED driver. The appropriate remote driver is provided with the fixture and should be installed in an accessible remote location per project requirements.