



HÅLL

CHA - 015

CUT SHEET

Revision number : #2
Revision date : 15 May 2026





HÅLL LINEAR PENDANT

CHA - 015

Description

Håll is a sculpted linear pendant crafted from solid hardwood, with a concave textured form that gathers and shapes light across its surface. Casting illumination upward, downward, and across its sides, the fixture creates a layered glow that reveals grain, depth, and shadow through the carved texture.

Product Specifications

Wood Finishes

Available in All Standard Wood Finishes

Cord Finishes

Available in All Standard Cord Finishes

Lengths

- 47.2”(1200mm) • 78.7” (2000mm)
- 59” (1500mm) • 86.6” (2200mm)
- 71” (1800mm) • 94.5” (2400mm)

Cord Lengths

We provide standard lengths that your installer cuts-down to a final size on-site during installation

Metal Finishes

Available in All Standard Metal Finishes

Mounting Options

- Continuous Canopy
- Dual Canopy (Remote Driver)

Textures

Available in All Standard Textures

Electrical

Input Voltage

100VAC - 277VAC

CCT Options

2700K, 3000K, Custom

Delivered Lumens

1005Lm/ft (3300Lm/M)

Wattage

12.2W/ft (40W/m)

CRI

95

Dimming

TRIAC / ELV / MLV / 0-10v / 1-10v

Electrical Notes

- Universal mounting accommodates standard ceiling junction box conditions unless otherwise noted
- Remote drivers, when used, must remain accessible for service and installed in accordance with local electrical code
- For remote driver layout, wire gauge, or maximum driver distance guidance, contact support@NorskaUSA.com
- Dimming compatibility varies by driver type and fixture configuration; refer to the dimming options specified for each fixture
- Fixture to be installed by a qualified electrician in accordance with local electrical code
- Projected L70: 70,000 hours

Light Control

This fixture is supplied with two dedicated drivers to support independent control of the up-cast and down-cast illumination. The two light outputs may be wired together for simultaneous switching, or wired independently to allow separate control of each direction of light.

Material Disclaimer


Due to the natural characteristics of solid hardwood, grain and tone variation will occur. Each fixture is unique.




HÅLL LINEAR PENDANT

CHA - 015

Continuous Canopy Dimensional Drawing

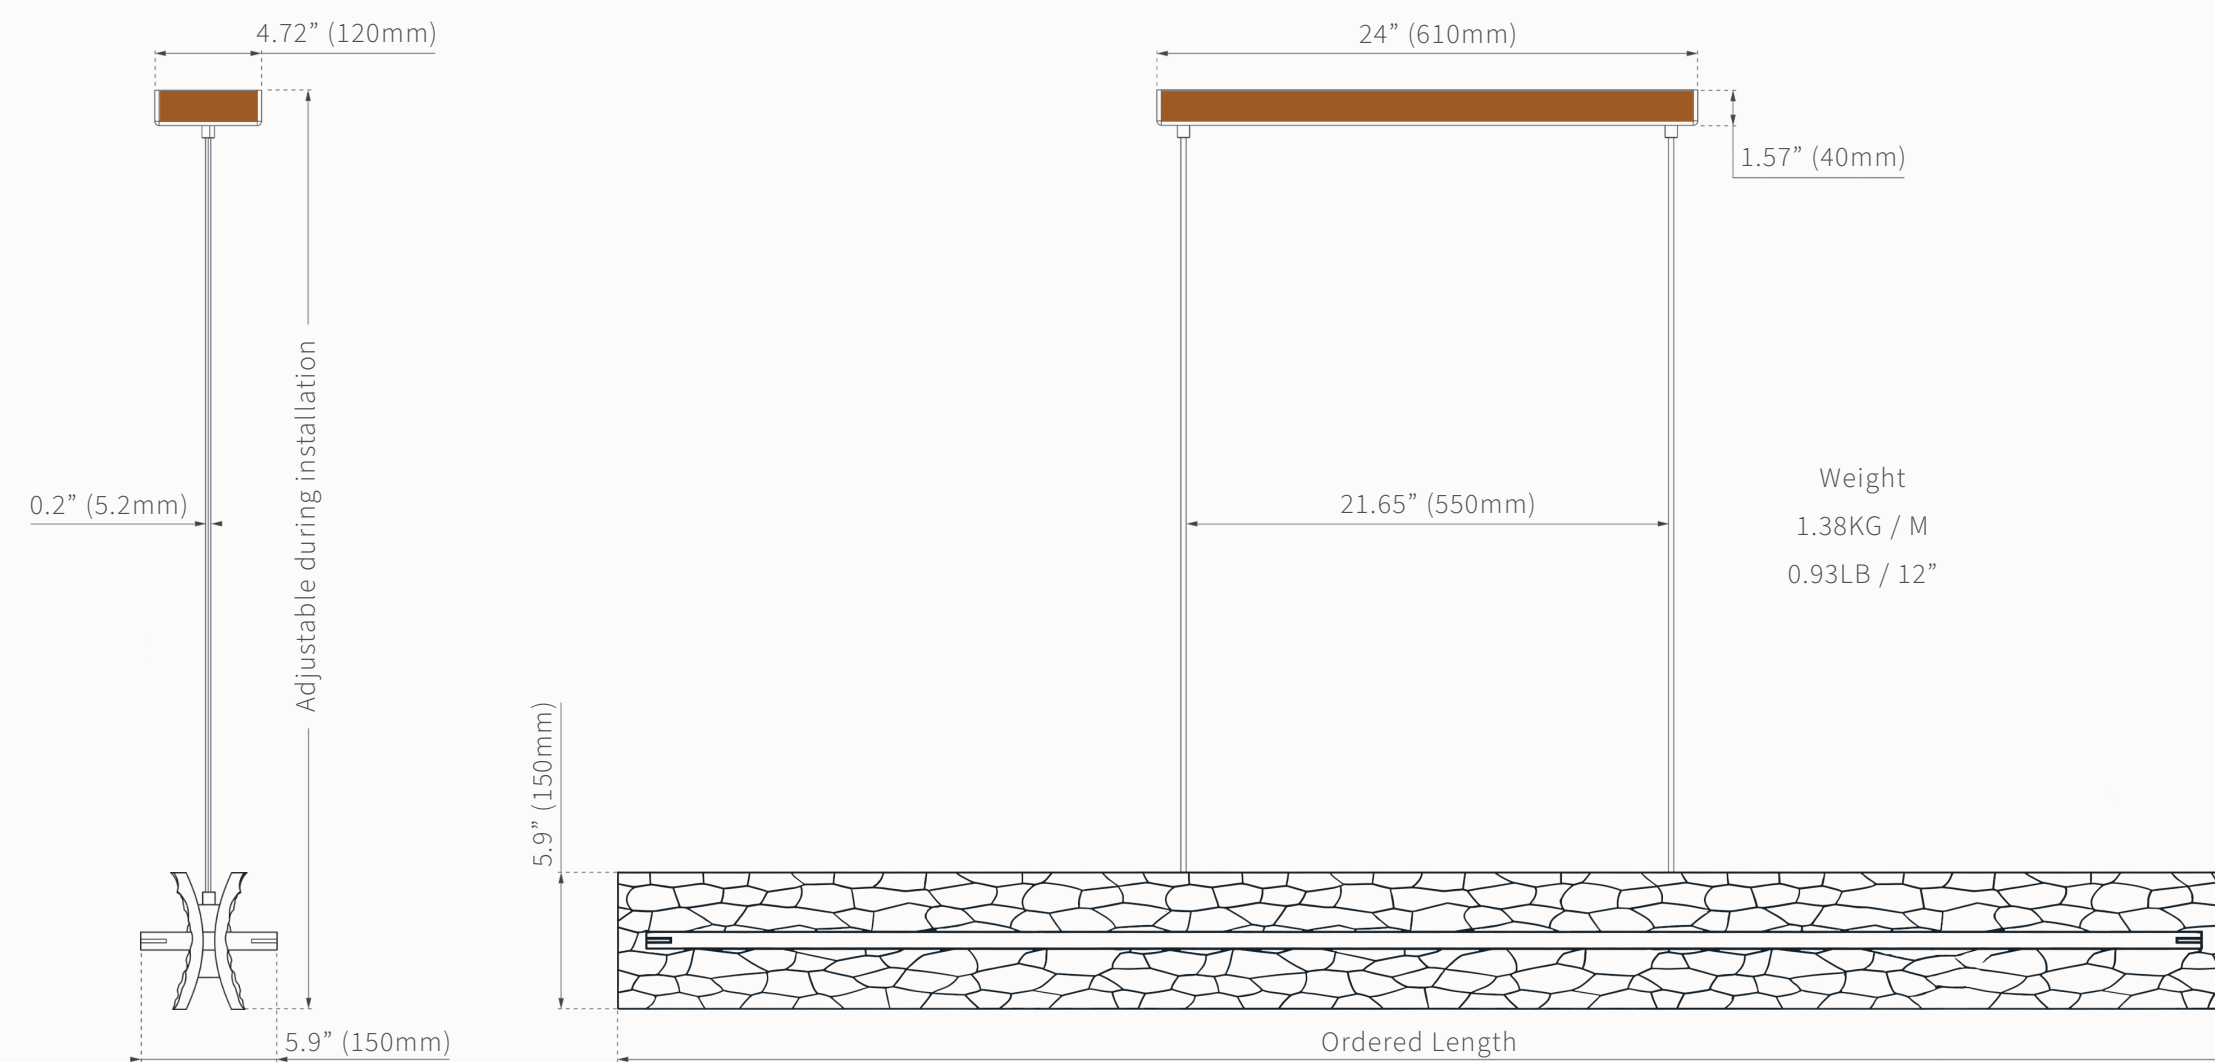


Continuous Canopy Hardware Diagram

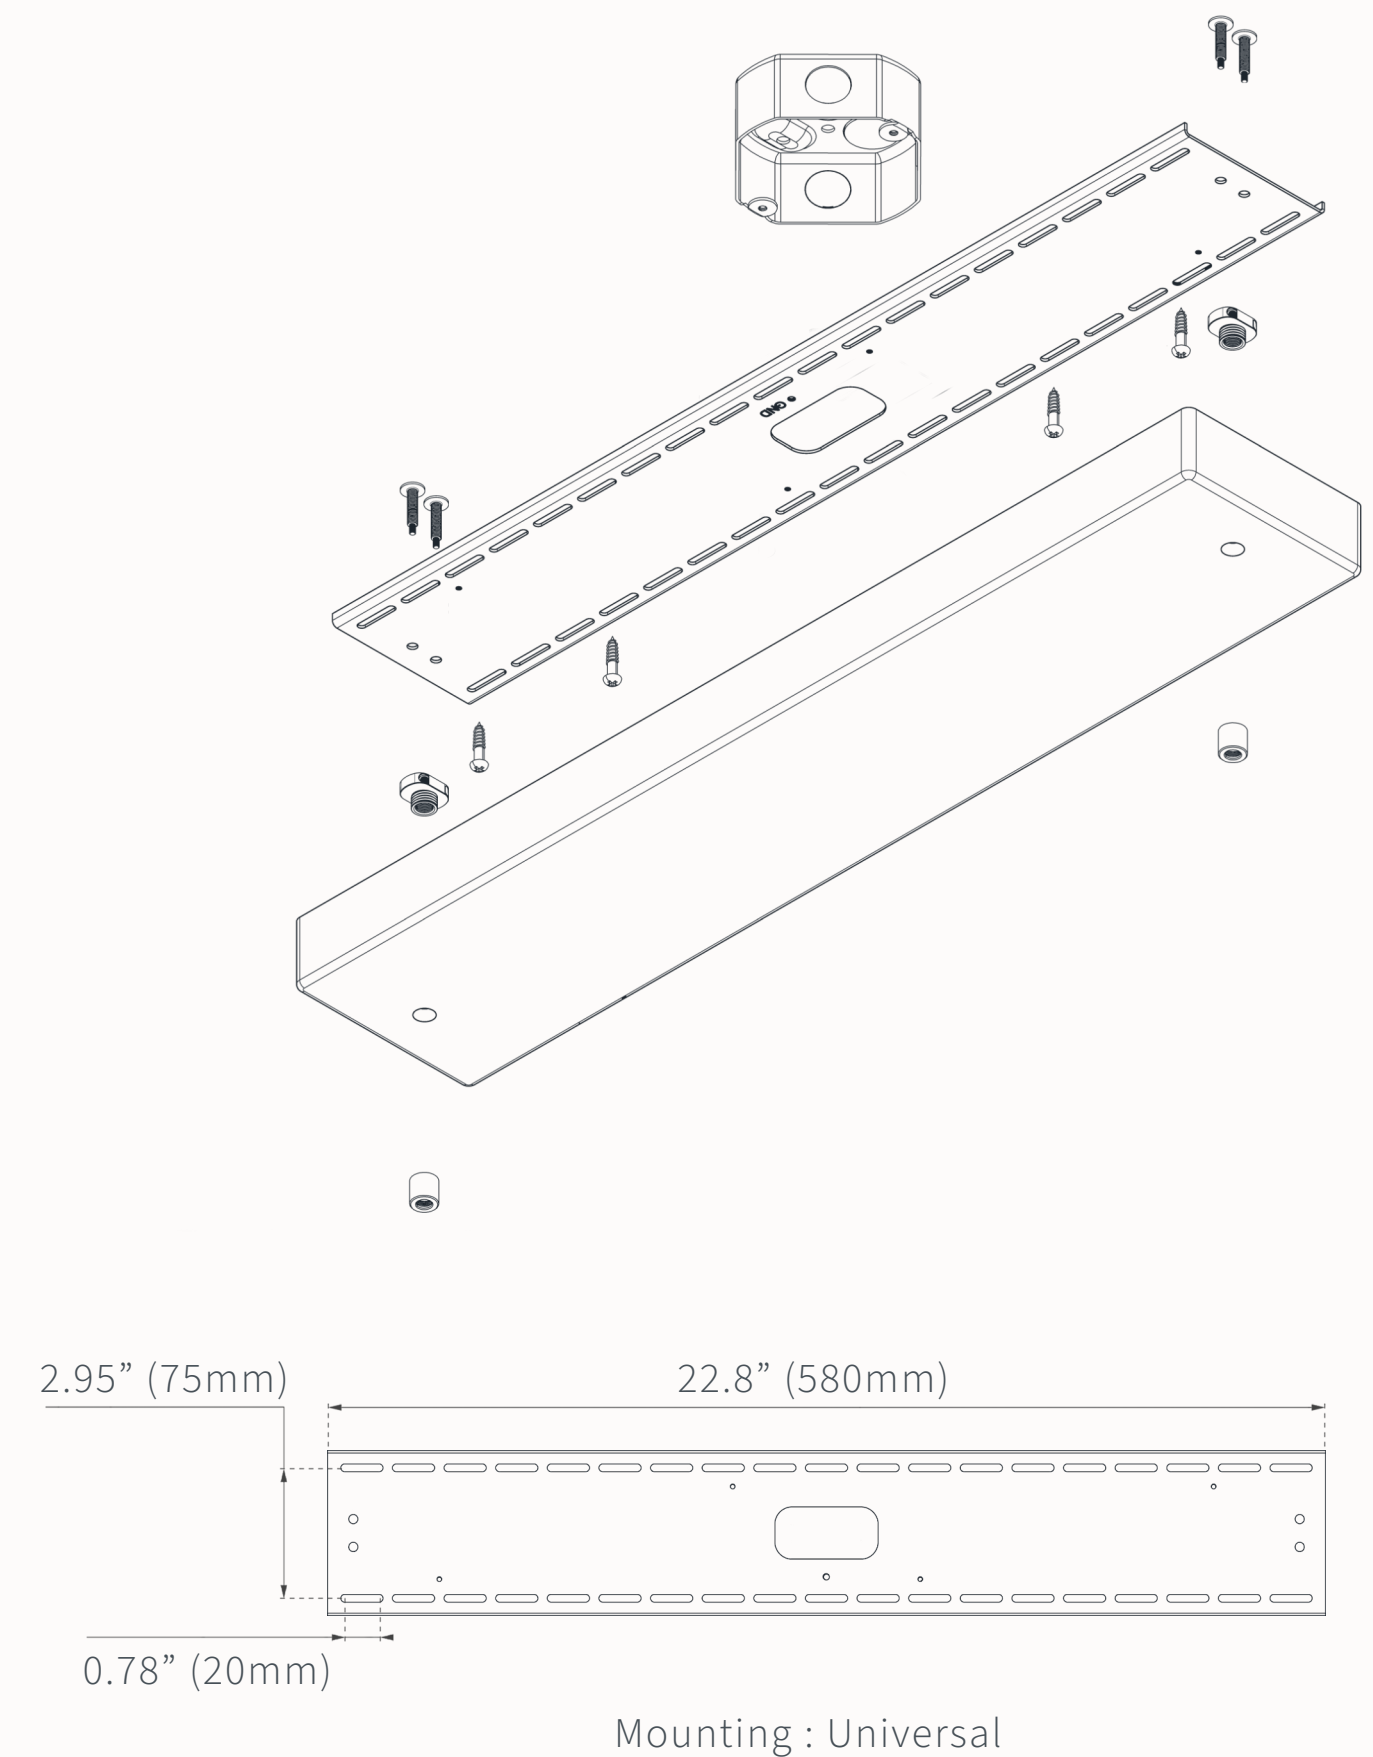




Dual Canopy Dimensional Drawing

For dual-canopy configurations, low-voltage conductors are routed through both suspension cables. Two remote drivers are required and provided, with one driver powering the up-cast light and the other powering the down-cast light. Custom canopy and cord spacing is available upon request.

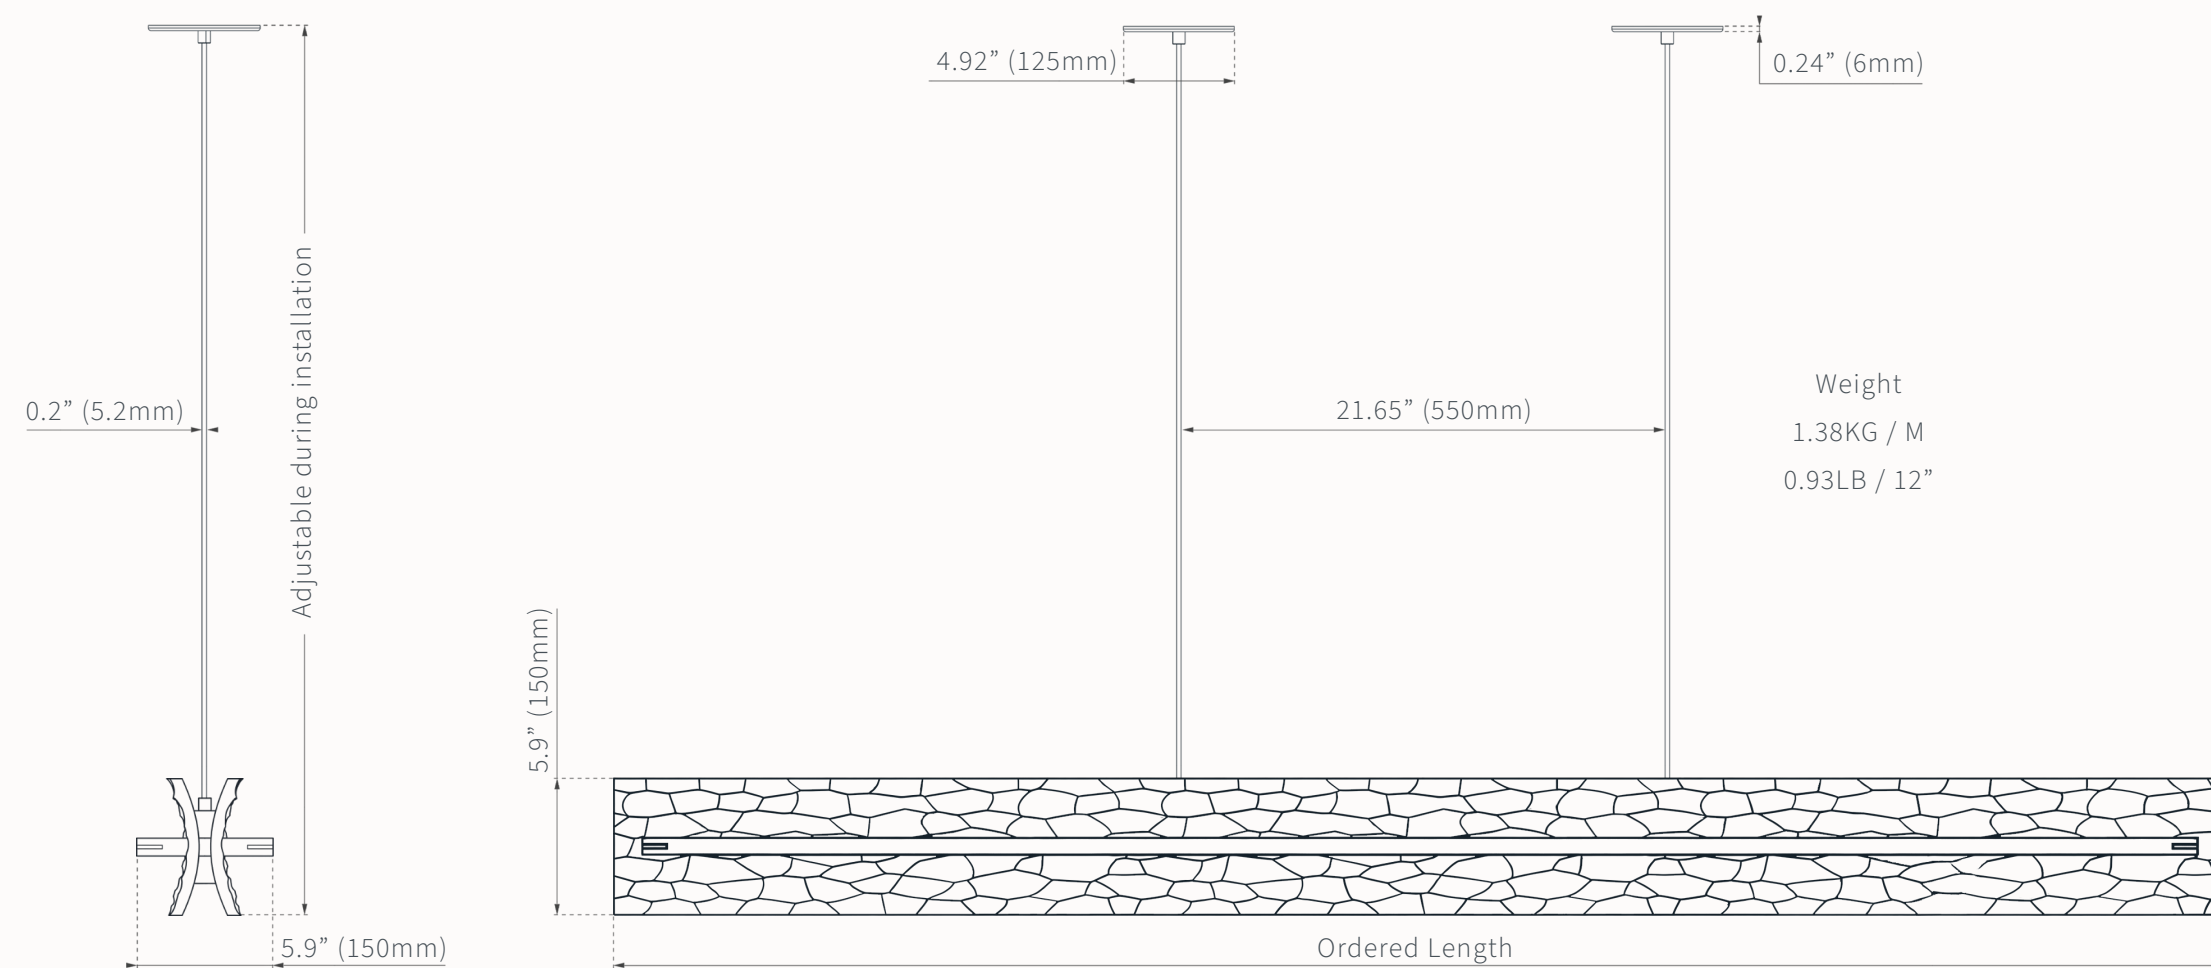

Remote driver is required for this mounting style and is provided with the fixture.

Dual Canopy Hardware Diagram

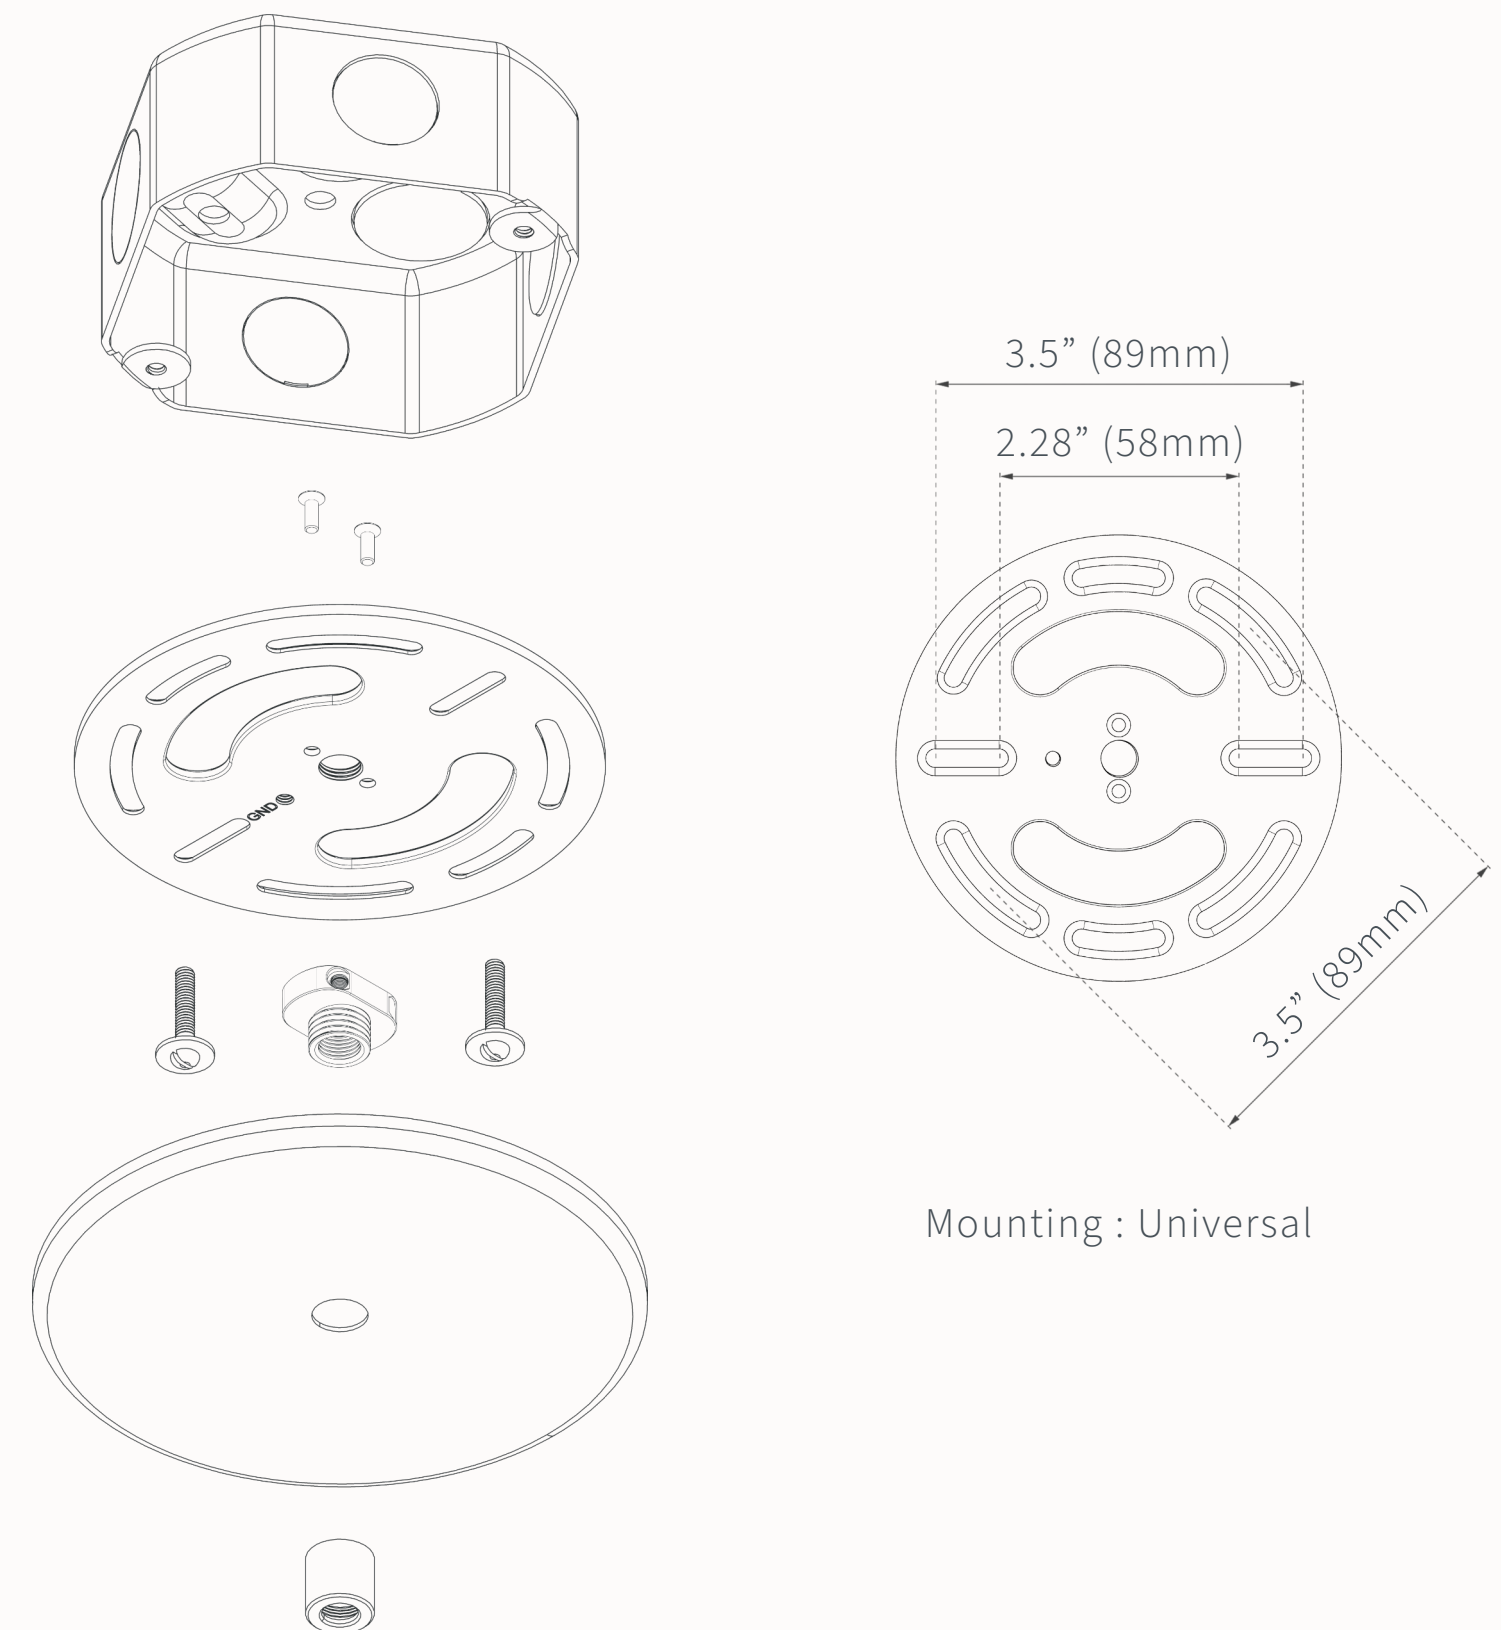



HÅLL LINEAR PENDANT

CHA - 015

Performance Table

Length	Wattage	Delivered Lumens	Weight
47.2"(120cm)	48W	3960LM	11.1 LB / 5.1 KG
59"(150cm)	60W	4950LM	13.8 LB / 6.3 KG
71"(180cm)	72W	5940LM	16.5 LB / 7.5 KG
78.7"(200cm)	80W	6600LM	18.6 LB / 8.4 KG
86.6"(220cm)	88W	7260LM	19.8 LB / 9.0 KG
94.5"(240cm)	96W	7920LM	21.9 LB / 9.9 KG

Compliance & Certifications

Dry / Damp Locations, cULus Certified





HÅLL LINEAR PENDANT

CHA - 015

Ordering Information

SKU Structure

CHA - 015 - CCC - DDD - EEE - FFF - GGG - HHH - III - JJJ - KKK - LLL

Options per Catagory

LENGTH - CCC

Length in cm (ie 71" (180cm))

MOUNTING - DDD

- Dual Canopy CUP
- Continuous Canopy CAN

TEXTURE - EEE

- Naguri Mark NGLM
- Naguri Line NGL
- Dune DUN
- Dotta DOT

CANOPY FINISH - FFF

- Black Anodized Aluminum BLK
- Architectural White WHT
- Brushed Stainless Steal BSS
- Matched Wood Finish MWF

WOOD FINISH - GGG

- Bleached Ash BAS
- Bleached White Oak BWO
- Maple MAP
- Ash ASH
- White Oak WHO
- Cherry CHE
- Walnut WAL
- Flame Blackened White Oak FBW
- Blackened Ash BLA

METAL FINISH - HHH

- Black Anodized Aluminum BLK
- Architectural White WHT
- Brushed Stainless Steel BSS
- Natural Brass BRA

CORD FINISH - III

- Black Cotton SVT Cord BKC
- White Cotton SVT Cord WHC
- Brass Mesh Cord BRM
- Blackened Brass Mesh Cord BBM
- Stainless Steel Mesh Cord SSM

CORD LENGTH - JJJ

Cord length in cm (ie 4.48" (114cm))

INPUT VOLTAGE - KKK

- 120VAC 120
- 240VAC 240
- 277VAC 277
- 24 VDC 024

COLOR TEMPERATURE - LLL

- 2700K 27K
- 3000K 30K

Example SKU

CHA - 015 - 180 - CUP - DUN - BLK - BWO - BRA - BKC - 114 - 120 - 27K

Configurator

Define fixture options and generate a complete specification SKU at NorskaUSA.com/configurator.

Custom Requests

For custom dimensions, finishes, mounting conditions, or project-specific requirements, contact Nörska Sales.

24VDC Remote Driver

Fixtures specified with 24VDC input require a remote LED driver. The appropriate remote driver is provided with the fixture and should be installed in an accessible remote location per project requirements.