



HÅLL SCONCE

WAL - 008

CUT SHEET

Revision number : #2
Revision date : 15 May 2026





HÅLL SCONCE

WAL - 008

Description

Håll reinterprets the sculpted language of its linear counterpart in a vertical wall form. Crafted from solid hardwood, its concave interior holds light within the fixture, allowing illumination to graze across the textured surface and reveal subtle shifts in grain, tone, and shadow. Mounted close to the wall, Håll brings material depth, architectural restraint, and a quiet atmospheric glow to the space.

Product Specifications

Wood Finishes

Available in All Standard
Wood Finishes

Textures

Available in All
Standard Textures


Lengths

- 15.75" (400mm)
- 23.6" (600mm)
- 31.5" (800mm)
- 39.4" (1000mm)
- 47.2" (1200mm)
- 53.2" (1350mm)
- 59" (1500mm)
- 71" (1800mm)

Material Disclaimer

Due to the natural characteristics of solid hardwood, grain and tone variation will occur. Each fixture is unique.

Mounting Hardware Diagram

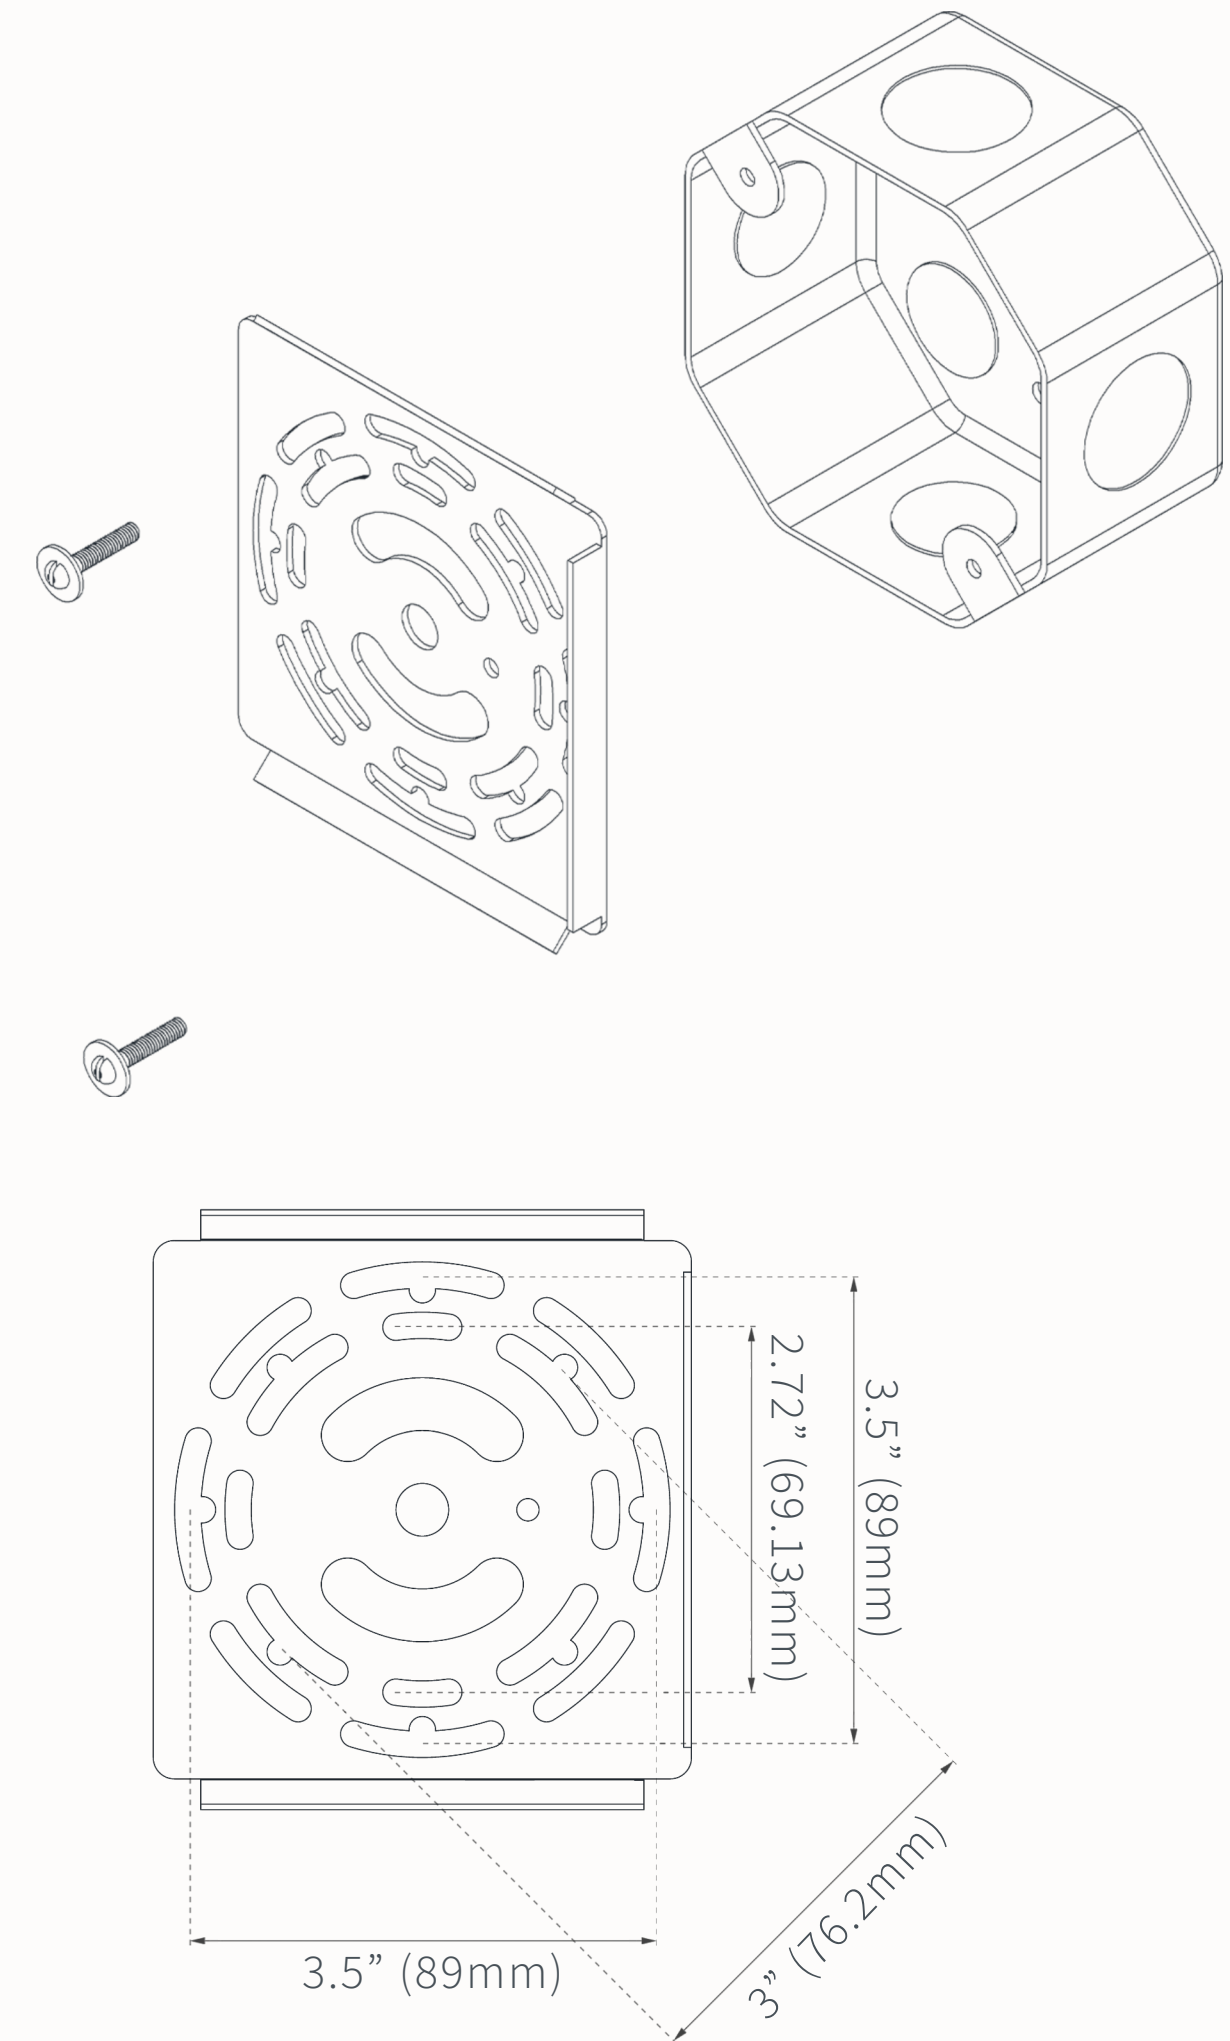



Mounting : Universal



HÅLL SCONCE

WAL - 008

Dimensional Drawing

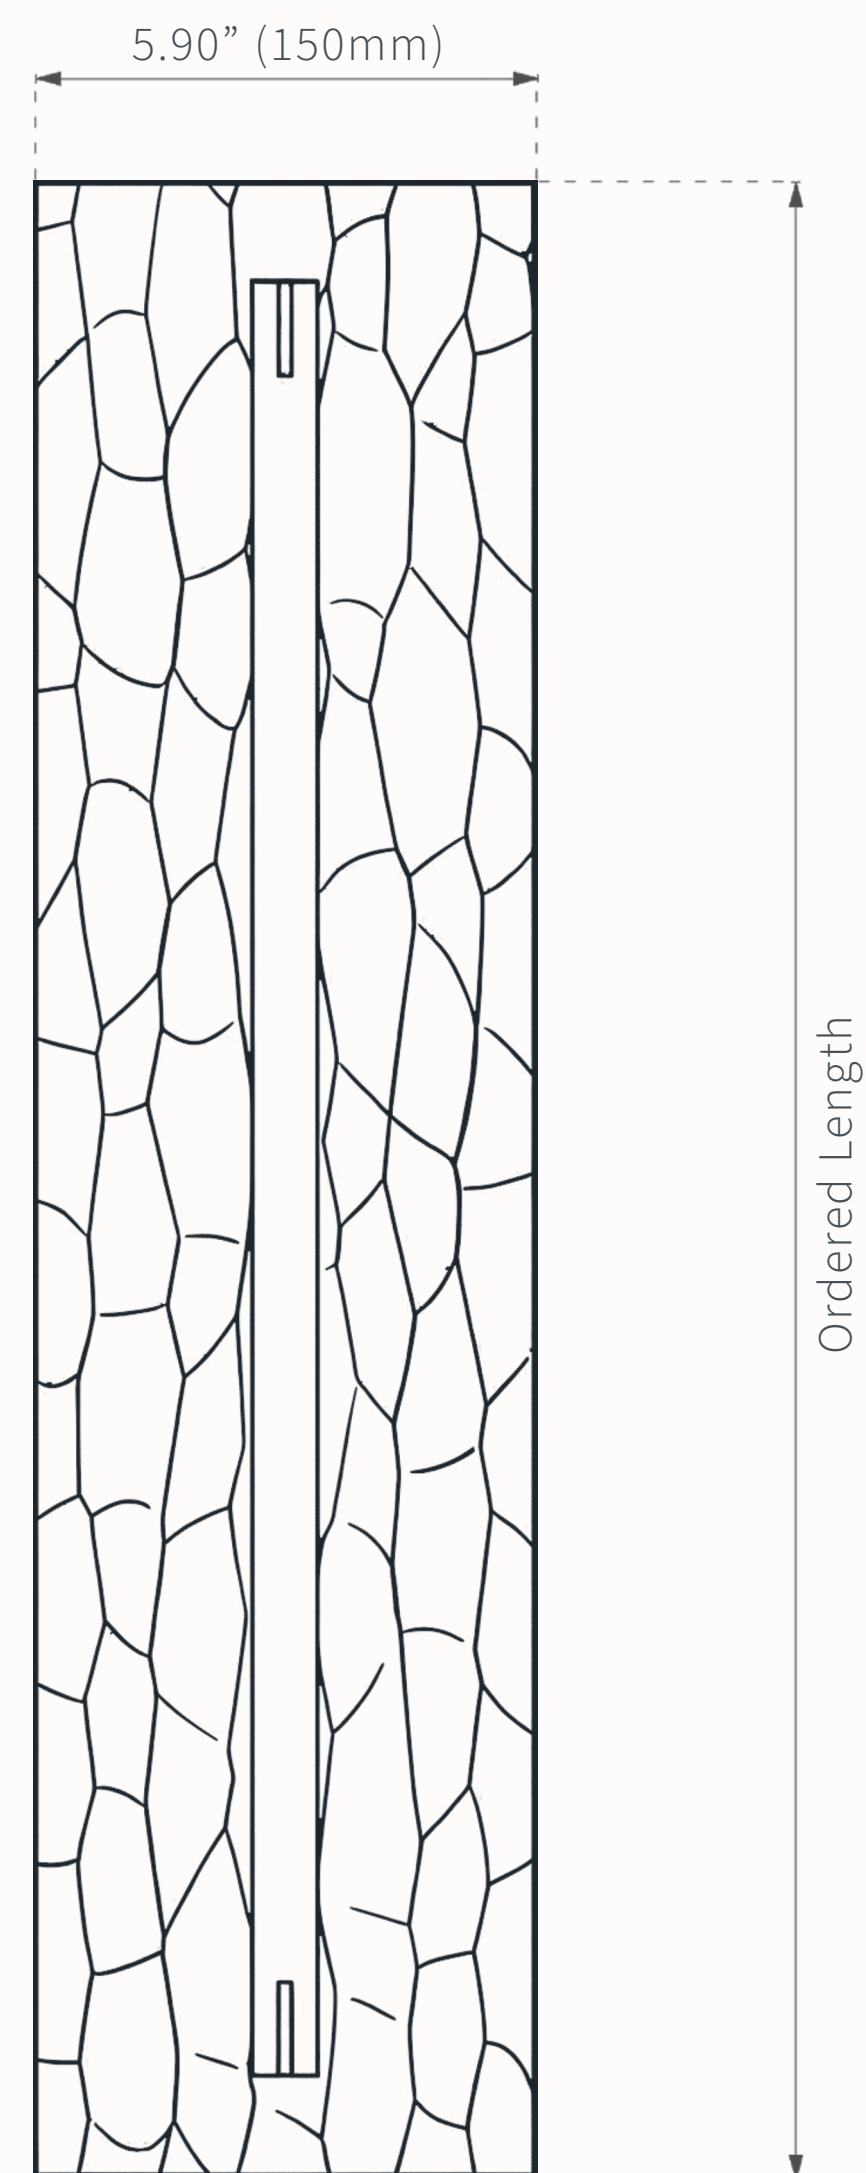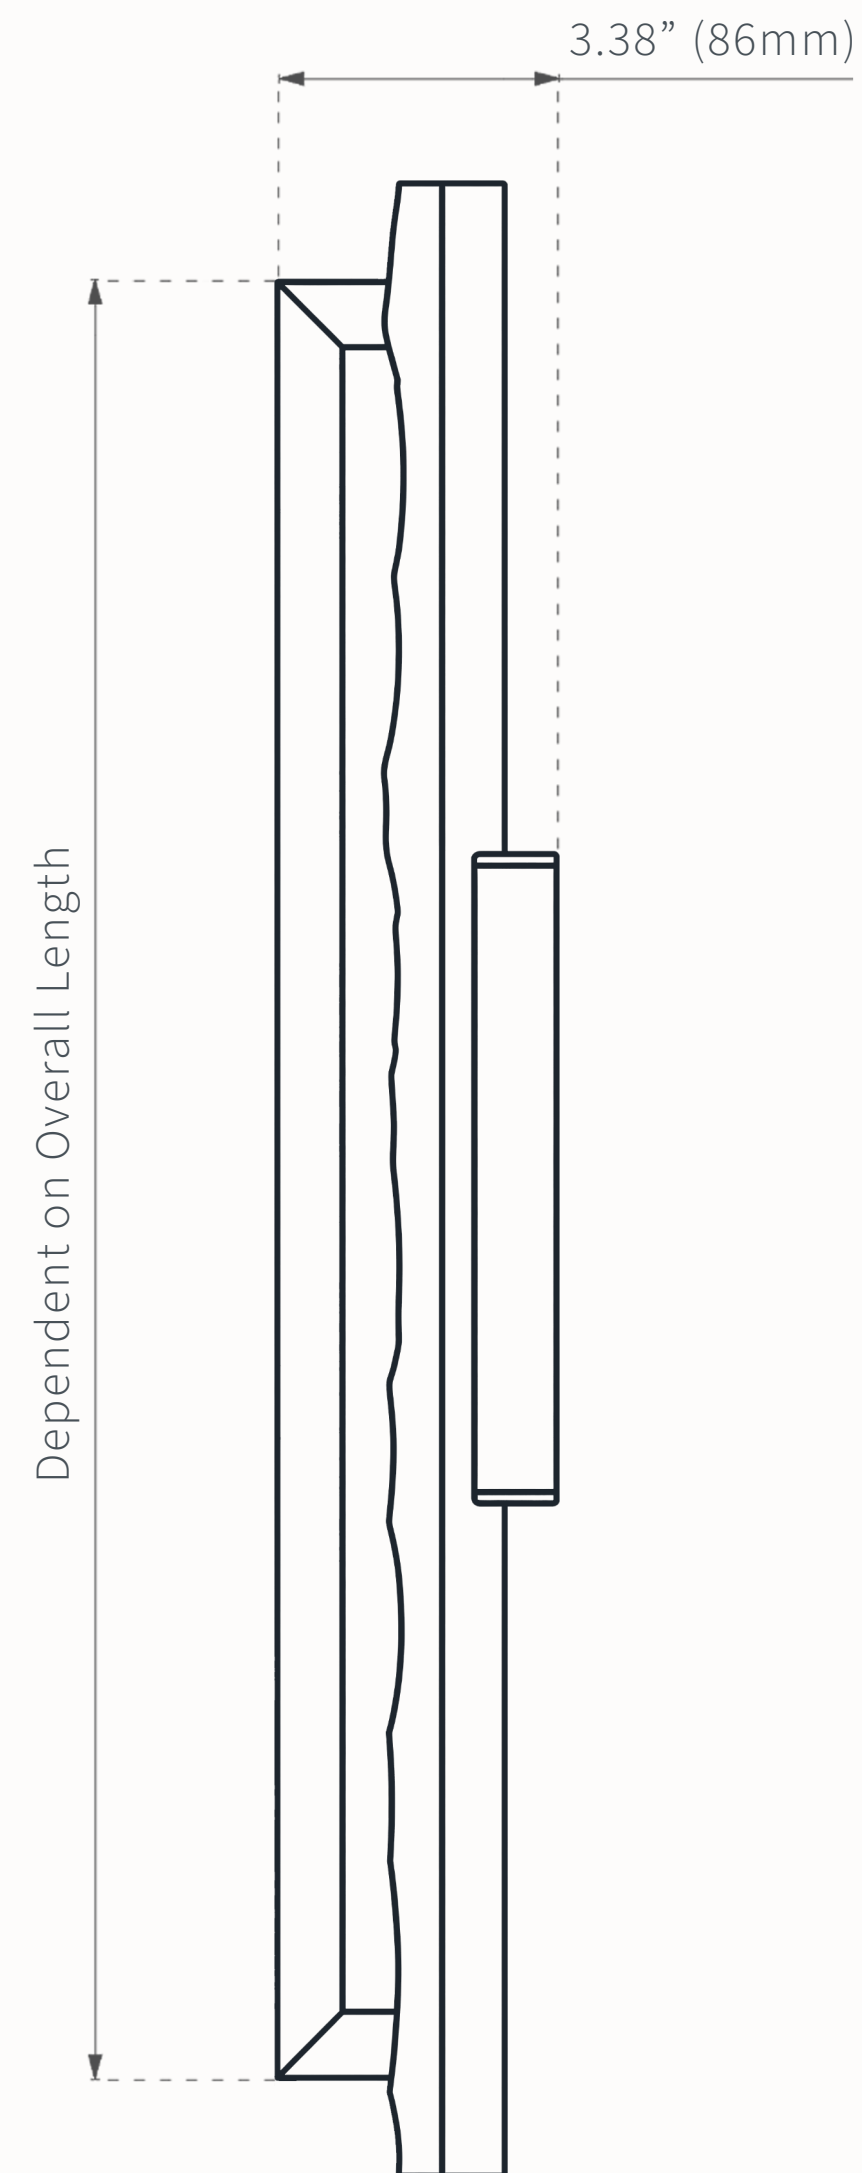



Electrical

Input Voltage 100VAC - 277VAC	CCT Options 2700K, 3000K, Custom	Delivered Lumens 402Lm/ft (1320Lm/M)
Wattage 4.88W/ft (16W/m)	CRI 95	Dimming TRIAC / ELV / MLV

Electrical Notes


- Universal mounting accommodates standard junction box conditions unless otherwise noted
- Remote drivers, when used, must remain accessible for service and installed in accordance with local electrical code
- For remote driver layout, wire gauge, or maximum driver distance guidance, contact support@NorskaUSA.com
- Dimming compatibility varies by driver type and fixture configuration; refer to the dimming options specified for each fixture
- Fixture to be installed by a qualified electrician in accordance with local electrical code
- Projected L70: 70,000 hours

Performance Table

Length	Wattage	Delivered Lumens	Weight
15.75" (40cm)	6.4W	528 LM	3.23 LB / 1.46 KG
23.6" (60cm)	9.6	792 LM	3.77 LB / 1.71 KG
31.5" (80cm)	12.8W	1056 LM	4.32 LB / 1.96 KG
39.4" (100cm)	16W	1320 LM	4.86 LB / 2.21 KG
47.2" (120cm)	19.2W	1584 LM	5.41 LB / 2.46 KG
53.2" (135cm)	21.6W	1782 LM	5.82 LB / 2.64 KG
59" (150cm)	24W	1980 LM	6.23 LB / 2.83 KG
71" (180cm)	28.8W	2376 LM	7.05 LB / 3.0 KG

Compliance & Certifications

Dry / Damp Locations, cULus Certified

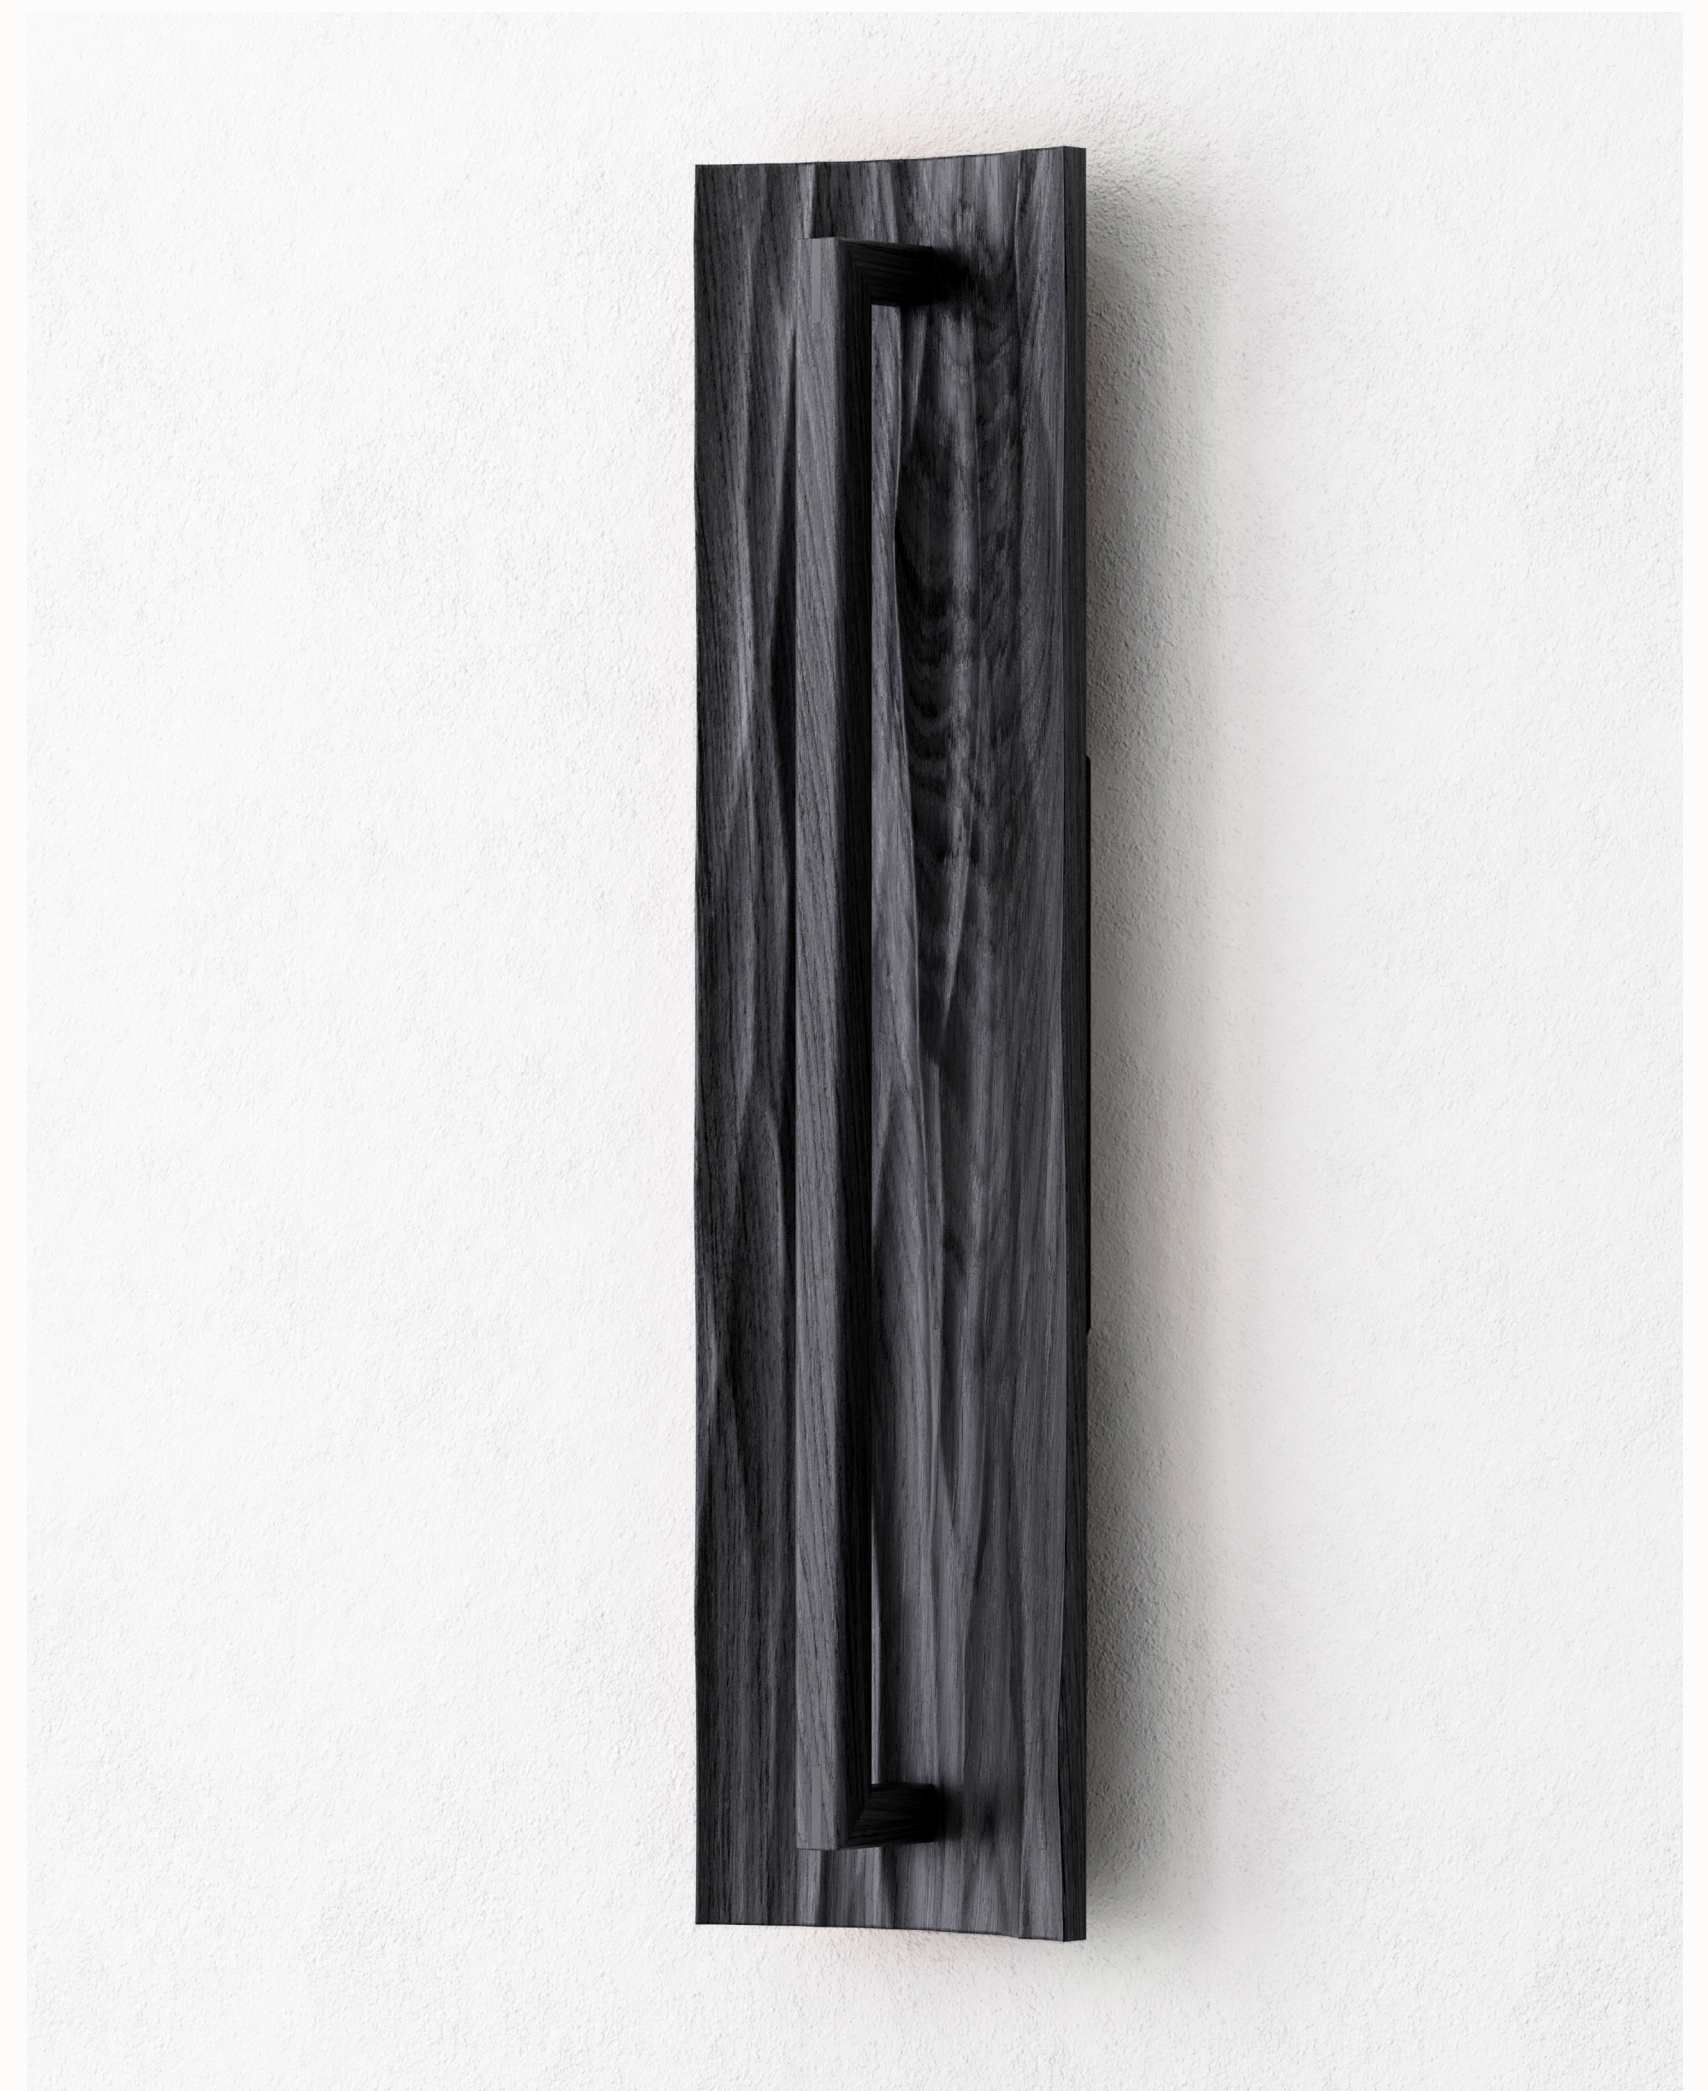



Ordering Information

SKU Structure

W A L - 0 0 8 - C C C - N T X - E E E - N M F - N G F - H H H - I I I

Options per Catagory

LENGTH - CCC

Length in cm (ie 31.5" (80cm))

TEXTURE - DDD

- Naguri Mark

N	G	M
---	---	---
- Naguri Line

N	G	L
---	---	---
- Dune

D	U	N
---	---	---
- Dotta

D	O	T
---	---	---

WOOD FINISH - EEE

- Bleached Ash

B	A	S
---	---	---
- Bleached White Oak

B	W	O
---	---	---
- Maple

M	A	P
---	---	---
- Ash

A	S	H
---	---	---
- White Oak

W	H	O
---	---	---
- Cherry

C	H	E
---	---	---
- Walnut

W	A	L
---	---	---
- Flame Blackened White Oak

F	B	W
---	---	---
- Blackened Ash

B	L	A
---	---	---

METAL FINISH - FFF

No Metal available

N	M	F
---	---	---

GLASS FINISH - GGG

No Glass available

N	G	F
---	---	---

INPUT VOLTAGE - HHH

- 120VAC

1	2	0
---	---	---
- 240VAC

2	4	0
---	---	---
- 277VAC

2	7	7
---	---	---
- 24 VDC

0	2	4
---	---	---

COLOR TEMPERATURE - III

- 2700K

2	7	K
---	---	---
- 3000K

3	0	K
---	---	---
- Custom

C	U	S
---	---	---

Example SKU

W A L - 0 0 8 - 0 8 0 - N G M - B W O - N M F - N G F - 1 2 0 - 2 7 K

Configurator

Define fixture options and generate a complete specification SKU at NorskaUSA.com/configurator.

Custom Requests

For custom dimensions, finishes, mounting conditions, or project-specific requirements, contact Nörska Sales.

24VDC Remote Driver

Fixtures specified with 24VDC input require a remote LED driver. The appropriate remote driver is provided with the fixture and should be installed in an accessible remote location per project requirements.