



SEKS POSTA

WAL - 003 / WAL - 004

CUT SHEET

Revision number : #2
Revision date : 15 May 2026





SEKS POSTA

WAL - 003 / WAL - 004

Description

Seks Posta expands the Posta form with a wider 60mm solid-hardwood body, creating a vertical indirect sconce with added scale and presence. Precisely milled timber posts hold the fixture slightly off the wall, allowing light to wash the surface behind it while emphasizing depth, shadow, and material warmth.

Product Specifications

Wood Finishes

Available in All Standard Wood Finishes

Metal Accent

- With Metal Accent
- Without Metal Accent

Metal Finishes

Available in All Standard Metal Finishes

End Style

SQUARE, WAL - 003

OVAL, WAL - 004


Lengths

- 15.75" (400mm)
- 23.6" (600mm)
- 31.5" (800mm)
- 39.4" (1000mm)
- 47.2" (1200mm)
- 53.2" (1350mm)
- 59" (1500mm)
- 71" (1800mm)

Material Disclaimer

Due to the natural characteristics of solid hardwood, grain and tone variation will occur. Each fixture is unique.



Mounting Hardware Diagram

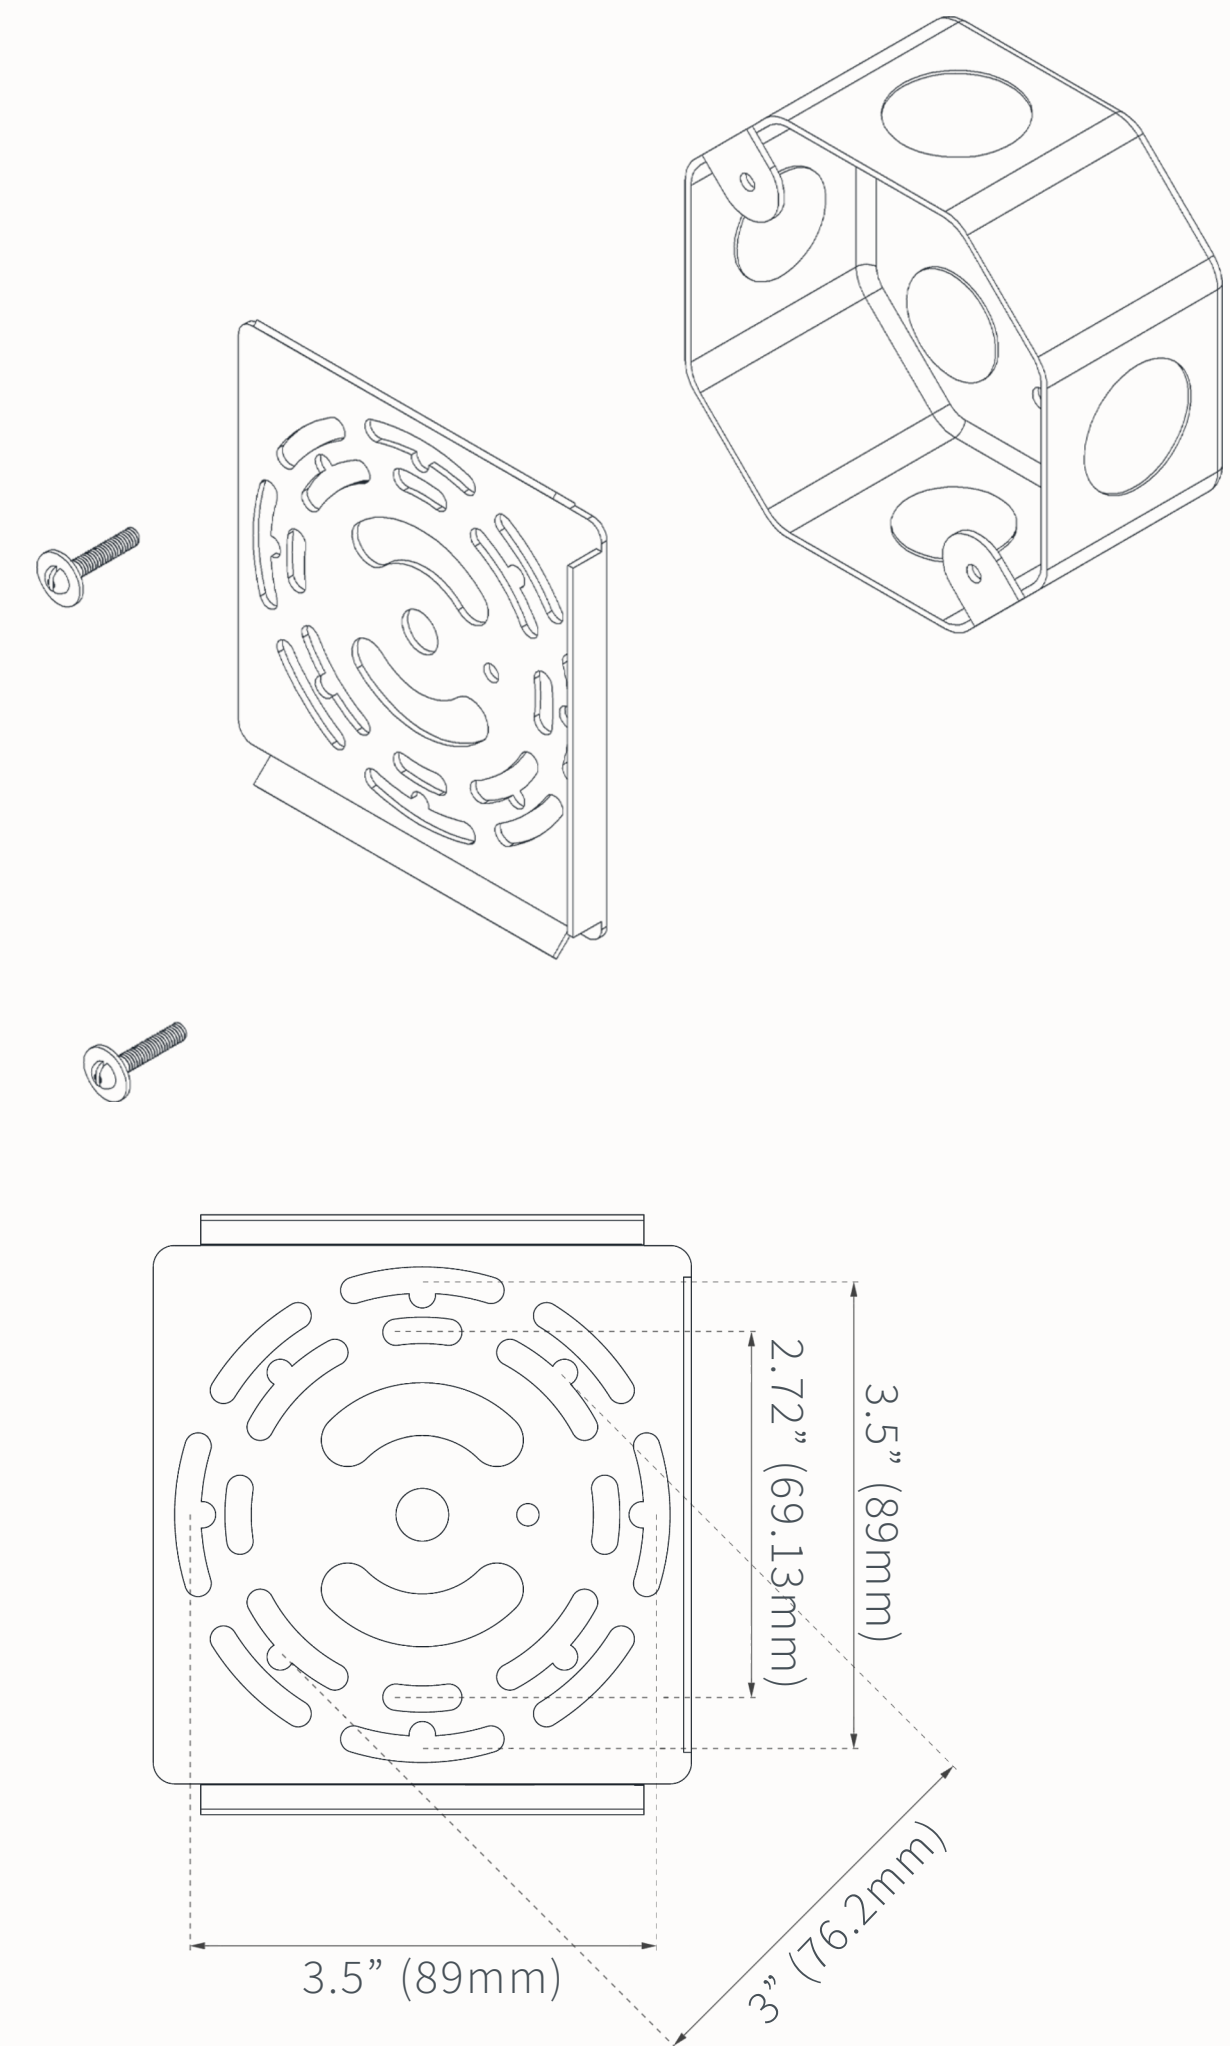

Mounting : Universal



Dimensional Drawing

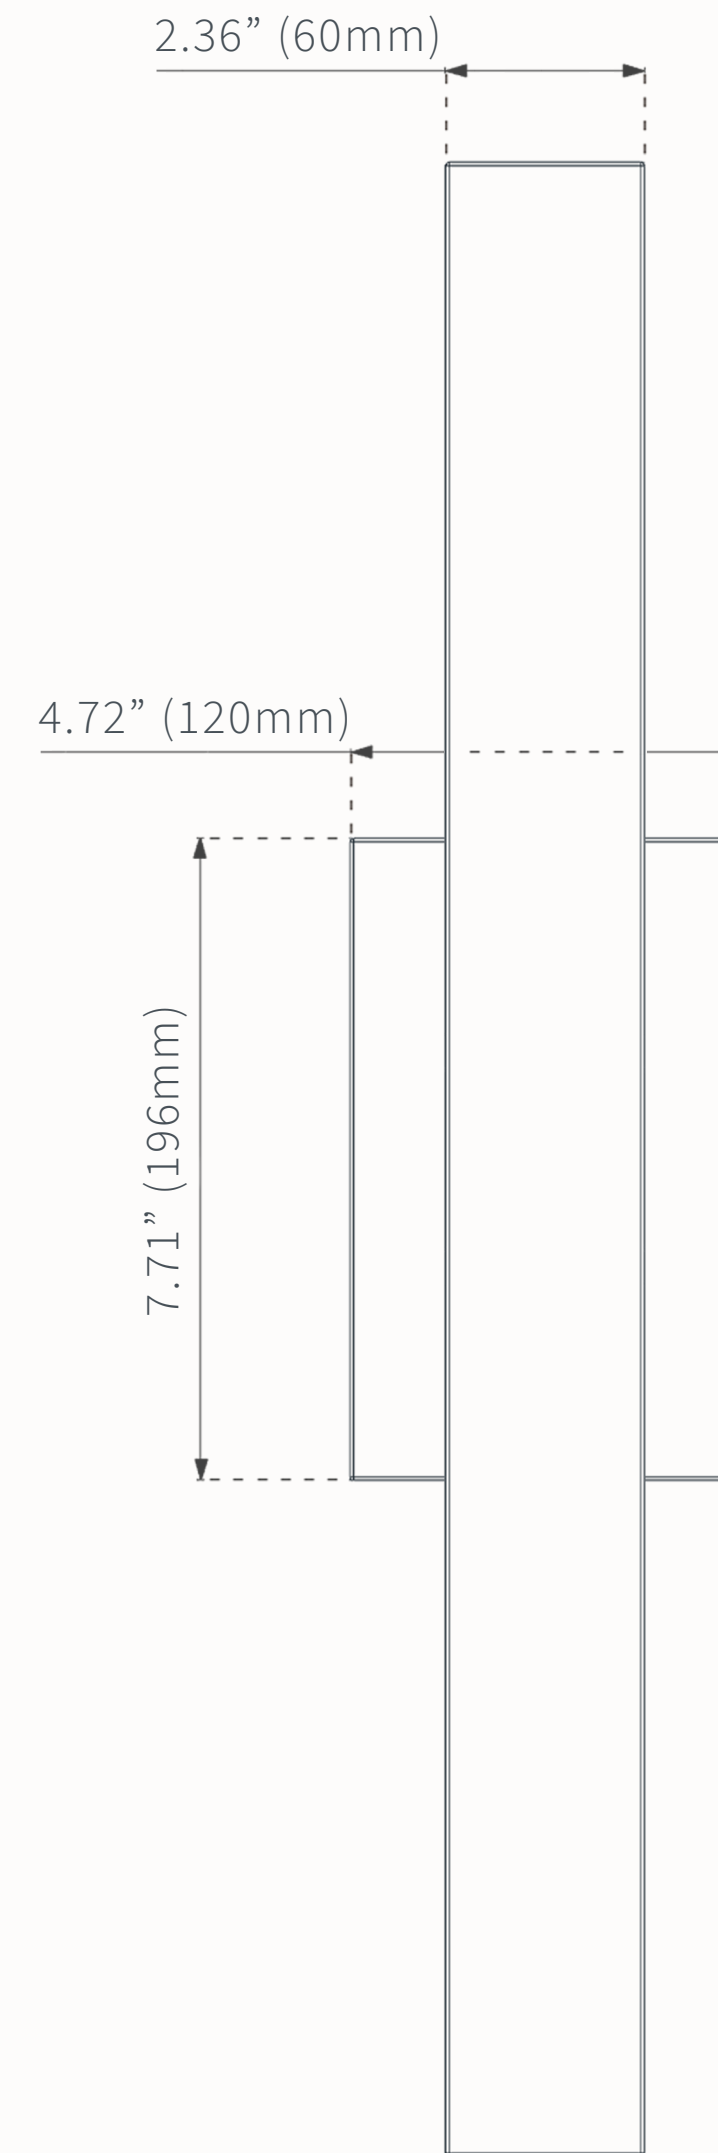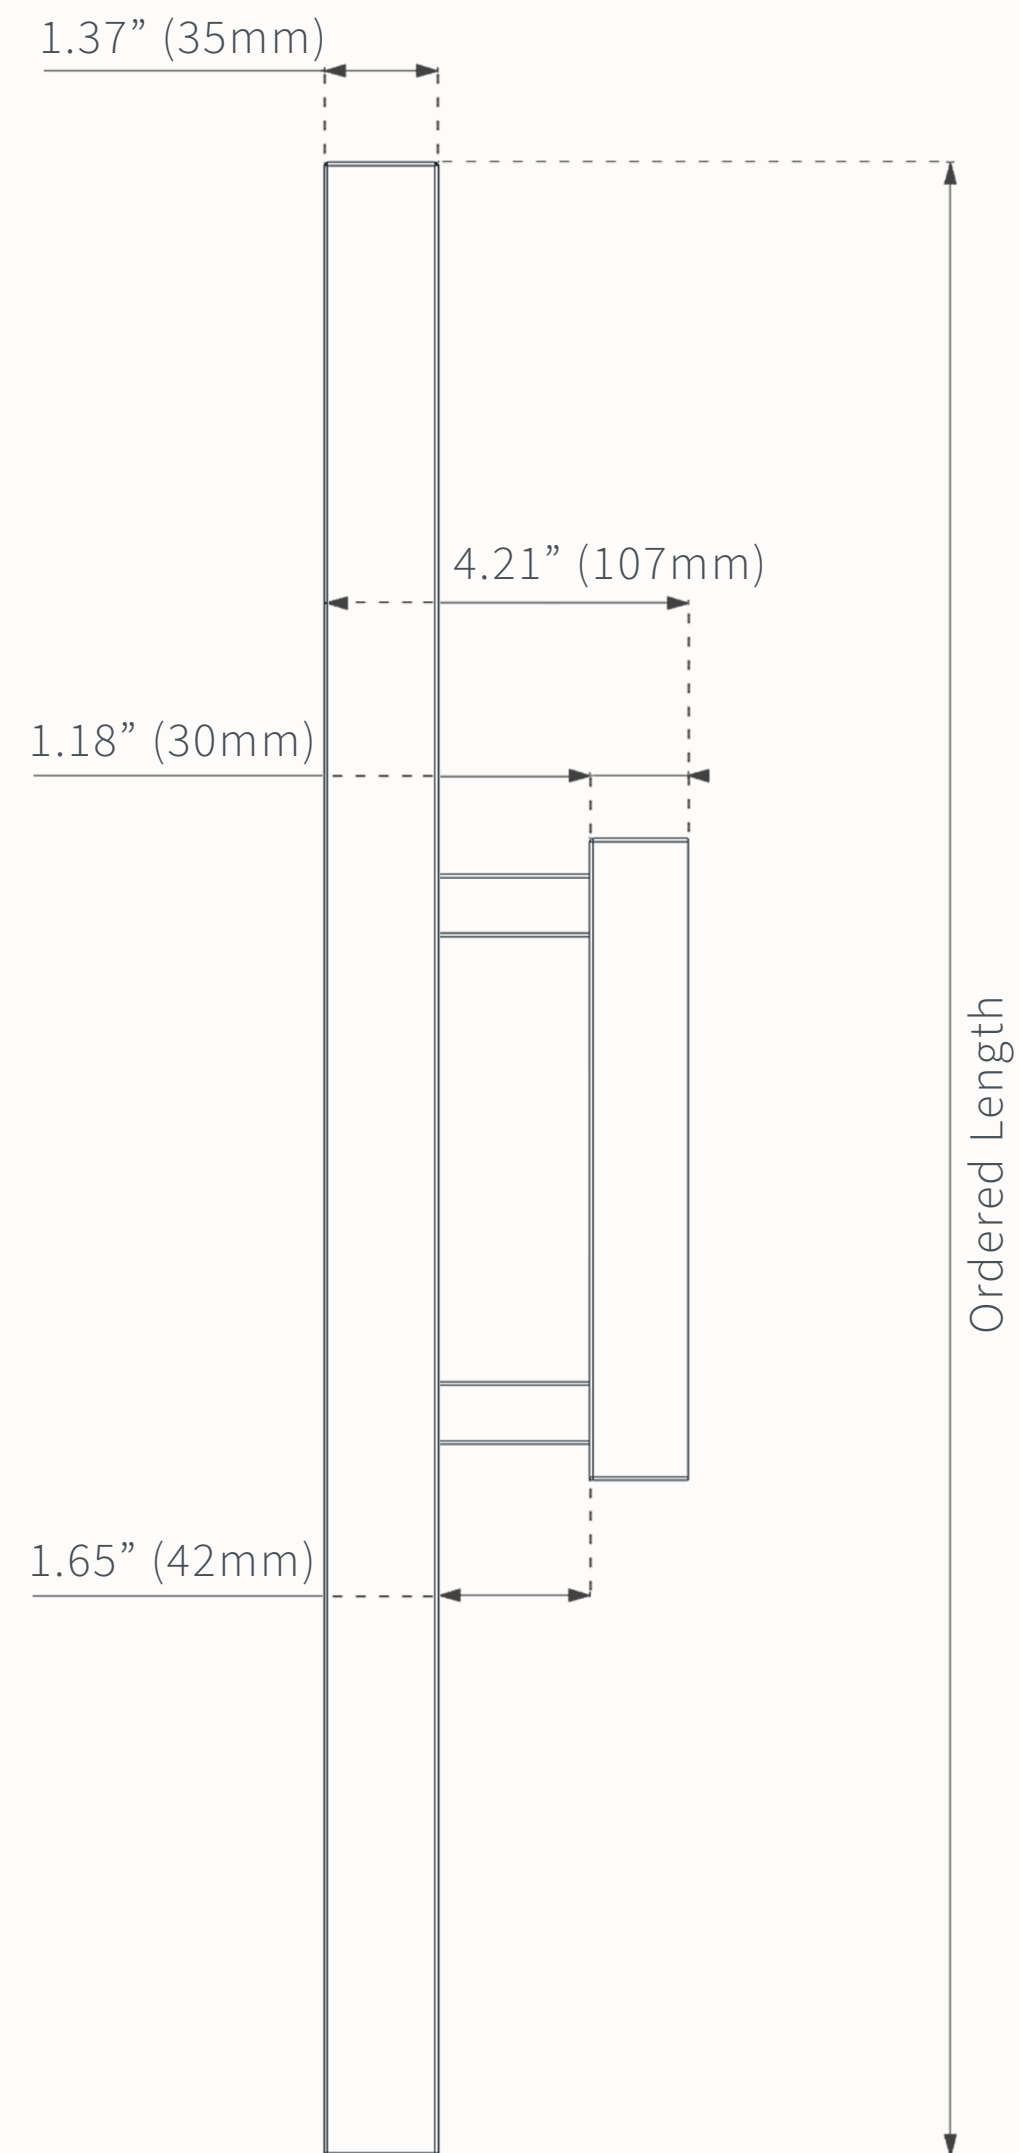



SEKS POSTA

WAL - 003 / WAL - 004

Electrical

Input Voltage 100VAC - 277VAC	CCT Options 2700K, 3000K, Custom	Delivered Lumens 402Lm/ft (1320Lm/M)
Wattage 4.88W/ft (16W/m)	CRI 95	Dimming TRIAC / ELV / MLV

Electrical Notes

- Universal mounting accommodates standard junction box conditions unless otherwise noted
- Remote drivers, when used, must remain accessible for service and installed in accordance with local electrical code
- For remote driver layout, wire gauge, or maximum driver distance guidance, contact support@NorskaUSA.com
- Dimming compatibility varies by driver type and fixture configuration; refer to the dimming options specified for each fixture
- Fixture to be installed by a qualified electrician in accordance with local electrical code
- Projected L70: 70,000 hours

Performance Table

Length	Wattage	Delivered Lumens	Weight
15.75" (40cm)	6.4W	528 LM	1.70 LB / 0.77 KG
23.6" (60cm)	9.6	792 LM	2.23 LB / 1.00 KG
31.5" (80cm)	12.8W	1056 LM	2.75 LB / 1.24 KG
39.4" (100cm)	16W	1320 LM	3.28 LB / 1.48 KG
47.2" (120cm)	19.2W	1584 LM	3.80 LB / 1.72 KG
53.2" (135cm)	21.6W	1782 LM	4.20 LB / 1.90 KG
59" (150cm)	24W	1980 LM	4.59 LB / 2.08 KG
71" (180cm)	28.8W	2376 LM	5.39 LB / 2.44 KG

Compliance & Certifications

Dry / Damp Locations, cULus Certified





Ordering Information

SKU Structure

W A L - B B B - C C C - N T X - E E E - F F F - N G F - H H H - I I I

Options per Catagory

DESIGN - BBB

- Square 0 0 3
- Oval 0 0 4

LENGTH - CCC

Length in cm (ie 31.5” (80cm))

TEXTURE - DDD

No Texture available N T X

WOOD FINISH - EEE

- Bleached Ash B A S
- Bleached White Oak B W O
- Maple M A P
- Ash A S H
- White Oak W H O
- Cherry C H E
- Walnut W A L
- Flame Blackened White Oak F B W
- Blackened Ash B L A

METAL FINISH - FFF

- Black Anodized Aluminum B L K
- Architectural White W H T
- Brushed Stainless Steel B S S
- Natural Brass B R A

GLASS FINISH - GGG

No Glass available N G F

INPUT VOLTAGE - HHH

- 120VAC 1 2 0
- 240VAC 2 4 0
- 277VAC 2 7 7
- 24 VDC 0 2 4

COLOR TEMPERATURE - III

- 2700K 2 7 K
- 3000K 3 0 K
- Custom C U S

Example SKU

W A L - 0 0 4 - 0 8 0 - N T X - B W O - B S S - N G F - 1 2 0 - 2 7 K

Configurator

Define fixture options and generate a complete specification SKU at NorskaUSA.com/configurator.

Custom Requests

For custom dimensions, finishes, mounting conditions, or project-specific requirements, contact Nörska Sales.

24VDC Remote Driver

Fixtures specified with 24VDC input require a remote LED driver. The appropriate remote driver is provided with the fixture and should be installed in an accessible remote location per project requirements.